

L05G Standard LED Tube

★ patented product, counterfeiting not allowed

专利产品 仿造必究

Size: 26*600/1200/1500mm

LED Q'ty:108pcs/216pcs/240pcs

Color Range: Warm White(3000K) Daylight White(4000K)

Pure White(5500K) Cold White(6500K)

Light Source: SMD LED

Housing: AL and High strength PC

Operation Temperature: -20°C to 40°C

Life Span: 50,000 hours

Voltage Range : AC 100-240V

Frequency:50Hz/60Hz

Beam angle: 120

PC Lens: Clear/Frosted

Color index(CRI)≥ 80

PF: ≥ 0.95

Power Efficiency: ≥ 0.85

Net Weight:

600mm/210g

1200mm/368.2g

1500mm/443.8g

Accessory:Fuse

Warranty: 3 years



1. Open Lock Button



2. End Cap rotated to scale




3. Release button End Cap locked automatically


Model	Power (W)	Size (mm)	LEDs (pcs)	Color	Frosted Lens		Clear Lens	
					Luminous Intensity	Lm/W	Luminous Intensity	Lm/W
L05G-11W	11	26*588	108	4000K	1045	95	1155	105
L05G-20W	20	26*1198	216	4000K	1900	95	2100	105
L05G-24W	24	26*1498	240	4000K	2280	95	2520	105

INSTALLATION INSTRUCTION


NOTE: Before installation please make sure the power is turned off.




1. Turn off the power




2. Take out the fluorescent tube




3. Take out the starter



4. Install LED fuse




5. Install LED tube




6. Turn on the power

1. When LED tube are replaced in a standard fluorescent tube batten, the starter must be removed, and replaced by the enclosed fuse.

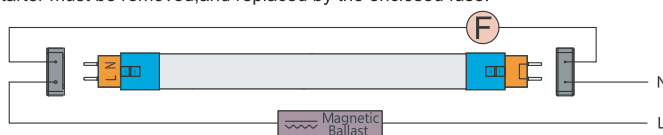

ATTENTION: Only suitable for battens with magnetic ballast, not electronic ballast.

2. Electronic ballast must be by-passed by a registered electrician.

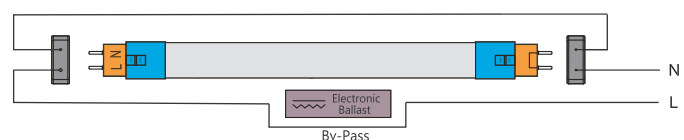

Hongkong Ervan Group Limited
Shenzhen Ruizi Light Electricity Technology Co., Ltd.

6F Bldg A, No.8 East area, Shangxue science & technology park, Bantian, Longgang, Shenzhen, Guangdong, China, 518129
Tel: (86-755) 6121 8896 Fax: (86-755) 6124 2066 E-mail: info@ervan.cn Web: www.ervan.cn