


PRIMASELECT™ FLEX

Why should I use PrimaSELECT™ FLEX?

- High flexibility with a shore hardness of 45D
- Good resistance to chemicals
- High UV resistance
- Good heat resistance

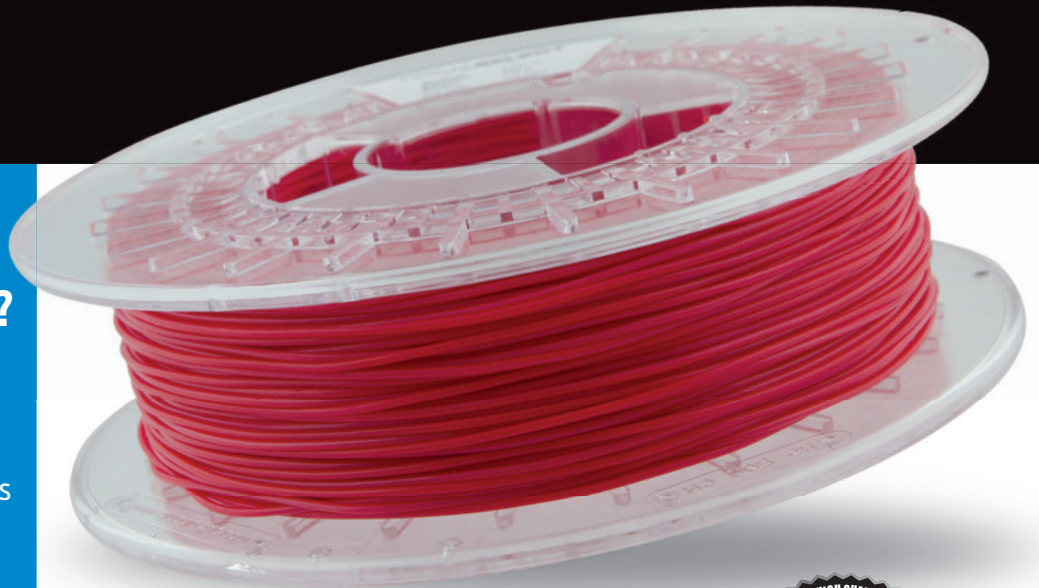

* Please see our website for latest options
and colors available.

PRIMASELECT™ FLEX

PrimaSELECT™ Flex is a new type of Thermoplastic Co-Polyester (TPC) with very rubber – like characteristics. This material is perfect when you need a strong, but still flexible filament. Our filament has a shore hardness of 45, which means that it's rigid but still pliable.

COLOURS AVAILABLE



WHITE BLACK BLUE RED WATER




PRIMA™
- FILAMENTS -

CONTACT INFORMATION:

Phone: +46 40 684 97 90 E-mail: info@primafilaments.com

www.primafilaments.com

PRIMASELECT™ FLEX

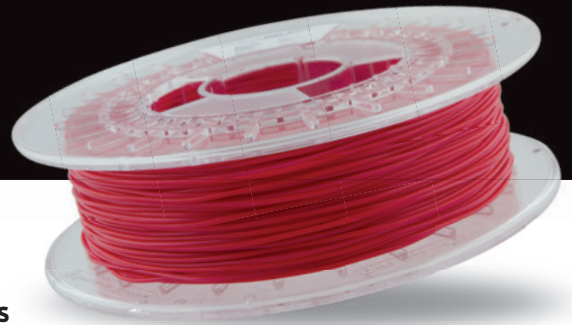

INFORMATION:

PrimaSELECT™Flex can create objects that are stretchable and can survive punishment that no ABS or PLA could tolerate. Another great thing with PrimaSELECT™Flex is its great UV and chemical resistance. The material can be bent and stretched but will always go back to its original shape. The one application that most people know this material from is mobile phone cases, so it's great for usage where you need the material to fit the model, not the other way around.

PrimaSELECT™Flex is best used with a heated bed which should be set to 90 - 100 °C it could also be used without heated bed depending on the type and size of your print.

A print speed of 10-30 mm/sec are preferred due to the material's flexibility.

PrimaSELECT™Flex sticks on BuildTak or glass plate coated with adhesive spray or glue stick.

PrimaSELECT™Flex is reeled on a transparent spool with 500 g of high quality filament. It's packed in a sturdy box and packed with silica gel to avoid moisture.

PrimaSELECT™Flex are available in diameter sizes of 1.75 mm and 2.85 mm.

Our state-of-the-art factory is equipped with the latest in laser measuring technology to ensure that you will receive a spool of filament with a very tight diameter and roundness tolerance. This in turn makes for a filament that is compatible with most common printers on the market today.

Dimensions

Size:	Ø tolerance	Roundness
1,75 mm	±0,05 mm	≥ 95 %
2,85 mm	±0,10 mm	≥ 95 %

Physical properties

Description:	Testmethod	Typical value
Specific gravity	ISO 1183	1,14 g/cc
Melt volume flow rate	ISO 1133	39 cm ³ /10 min
Stress at break	ISO 527	24
Strain at break	ISO 527	530,00 %
Tensile modulus	ISO 527	95 MPa
Impact strength Charpy method 23 °C	ISO 179	Notched No break
Shore D Hardness	ISO 868	45

Thermal properties

Description:	Testmethod	Typical value
Printing temp.	-	220-260 °C
Melting temp.	ISO 11357	180 °C

Reseller: