


ARCHERY
EASTON
2015

ADVANCING ARCHERY'S LEGACY



ADVANCING ARCHERY'S LEGACY

Doug Easton realized when he started his modest bow and arrow construction business in 1922, only perfect repeatability leads to a perfect score. That single-minded, relentless pursuit defined Easton to archers throughout the 20th century—and still does today. Doug, his son Jim, and Jim's son Greg, all have pursued that elusive yet essential principle. They did it by changing the game, developing new materials and new processes, creating new designs and constantly improving on them to reach the peak of performance. Today, that's still what defines Easton.

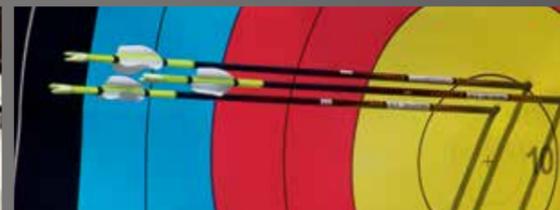

X10®

X10 shafts have been used to win more Olympic and World Championship titles than any other archery product ever. It's the ultimate target shaft.

- High-strength carbon fiber bonded to a 7075 alloy core
- 9-micron polished carbon finish
- Guaranteed straightness: ± .0015"
- Weight tolerance: ± 0.5 grains
- Components—sold separately

X10 INSERT AND POINT SYSTEM



Size	Shaft Weight ¹ Grains per Inch	Spine @ 28" Span Deflection in Inches	Stock Length Inches	Maximum Trim Amount ² Inches	Recommended Point Weight Range Grains
1000	5.3	1.000	28	No limit	90-110
900	5.8	0.900	28	No limit	90-110
830	6.2	0.830	28½	No limit	90-110
750	6.4	0.750	29	3.5	100-110
700	6.7	0.700	29	3.5	100-110
650	6.8	0.650	29	3.5	100-110
600	7.0	0.600	30	4.5	100-110
550	7.5	0.550	31	3.5	100-120
500	7.8	0.500	32	4.0	100-120
450	8.1	0.450	33½	5.5	100-120
410	8.5	0.410	33¾	5.5	100-120
380	8.9	0.380	33¾	6.5	100-120
350	8.4	0.350	34	No Limit	100-120
325	8.8	0.325	34¼	No Limit	100-120

¹ Due to the barrel design of the X10, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 6-7 grains.
² Recommended that no more than these lengths be cut from the front of the shaft.
³ Pin Nock colors: crystal, green, red, blue, orange, and pink in .088" and .098" string groove sizes.
⁴ Over Nock colors: green, orange, and yellow in .088" string groove size.
⁵ G Pin Nock colors: crystal, green, red, blue, orange, and pink in .098" string groove size.



In the 1930's, Doug Easton invented the four-footed Barreled arrow shaft. This innovation increased the strength and FOC of the arrow by painstakingly splicing a dense, Ironwood or Beefwood point section onto a lightweight cedar shaft, creating 360 degree spine consistency and unmatched flight properties—they were also much more forgiving for finger release. Due to the hours of craftsmanship required Doug's arrows were costly and archers waited months to get a set-but the wait was worth it. Today, Easton employs similar Barreled technology for the same advantages Doug realized in the 1930's.


Original Doug Easton hand made Wood arrows circa 1930

A/C/E®

The arrow that started the barreled revolution. Lightweight, hyper-accurate and the premium choice for intermediate range competition such as field archery with unmarked distances.

- Lightweight carbon fiber bonded to 7075 alloy core
- Guaranteed straightness ± .0015"
- Weight tolerance: ± 0.5 grains
- Components—sold separately

A/C/E INSERT AND POINT SYSTEM 5-44 THREAD

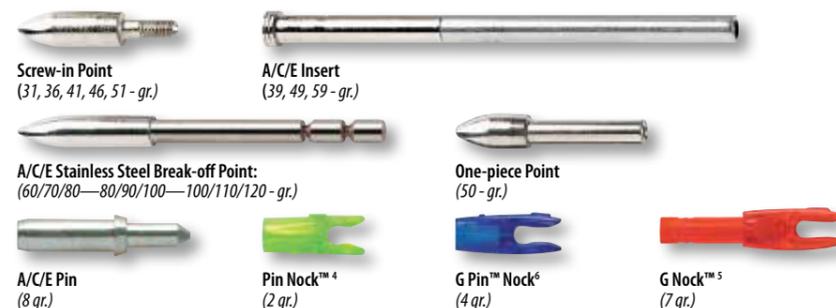

A/C/E® Insert and Point System 5-44 Thread

A/C/E Insert	#2-31gr.	#3-36gr.	#4-41gr.	#5-46gr.	#6-51gr.
Screw-in Point	Total Weight (grains)—Insert and Point				
H - 39gr.	70	75	80	85	90
J - 49gr.	80	85	90	95	100
L - 59gr.	90	95	100	105	110

Size	Shaft Weight ¹ Grains per Inch	Spine @ 28" Span Deflection in Inches	Stock Length Inches	Maximum Trim mount ³ Inches	Recommended Point Weight Range Grains
1250 ²	5.1	1.250	26½	No limit	60-70
1100 ²	5.1	1.100	28½	No limit	70-80
1000	5.7	1.000	28½	No limit	70-80
920	5.8	0.920	28½	9.5	70-80
850	5.7	0.850	28½	No limit	70-80
780	6.0	0.780	29½	No limit	80-90
720	6.4	0.720	29½	6.0	80-90
670	5.9	0.670	30½	No limit	80-90
620	6.1	0.620	30½	No limit	90-100
570	6.3	0.570	31½	10.0	90-100
520	6.7	0.520	31½	4.5	90-100
470	6.8	0.470	32½	6.5	90-110
430	7.0	0.430	32½	5.5	100-120
400	7.5	0.400	32½	4.0	100-120
370	7.9	0.370	32½	4.0	110-120

¹ Due to the barrel design of the A/C/E, the weight is an average grains-per-inch of a 29" shaft. Shaft weight is slightly heavier in the larger diameter center and lighter toward the tapered ends. One inch of shaft cut from the point end typically weighs 5-6 grains.
² Available as a special order only. Replaced with A/C/C-00 sizes.
³ Recommended that no more than these lengths be cut from the front of the shaft.
⁴ Pin Nock colors: crystal, green, red, blue, orange, and pink in .088" and .098" string groove sizes.
⁵ G Nock colors: black, white, green, orange, and red in .088" and .098" string groove sizes.
⁶ G Pin Nock colors: crystal, green, red, blue, orange and pink in .098" string groove size.




Ki Bo Bae (KOR)

X10[®] PROTOUR[™]

World records speak for themselves. So do world championships. Compound competitors worldwide win with record-setting X10 Pro Tour.

- High-strength carbon fiber bonded to a 7075 alloy core
- 9-micron polished carbon finish
- Guaranteed straightness ± .0015"
- Weight tolerance: ± 0.5 grains
- Components—*sold separately*

X10 PROTOUR INSERT AND POINT SYSTEM

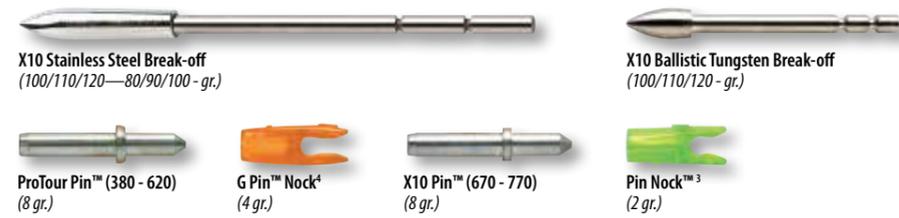

Size	Shaft Weight ¹	Spine @ 28" Span	Stock Length	Maximum Trim Amount ²	Recommended Point Weight Range
	Grains per Inch	Deflection in Inches	Inches	Inches	Grains
770	6.0	0.770	29	No limit	90-110
720	6.2	0.720	29½	No limit	90-110
670	6.5	0.670	29¾	4.0	100-110
620	6.7	0.620	30	4.5	100-110
570	6.9	0.570	31	5.0	100-120
520	7.3	0.520	32	5.5	100-120
470	7.6	0.470	33¼	6.0	100-120
420	8.0	0.420	33¾	6.5	100-120
380	8.4	0.380	34	7.0	100-120

1 Due to the taper design of the X10 Pro Tour, the grain weight-per-inch shown is an average weight-per-inch of a 29" shaft. Shaft weight is slightly heavier toward the larger-diameter nock end and lighter toward the tapered front end. One inch of shaft cut from the point end typically weighs 6-7 grains.
 2 Recommended that no more than these lengths be cut from the front of the shaft.
 3 Pin Nock colors: crystal, green, red, blue, orange, and pink in .088" and .098" string groove sizes.
 4 G Pin Nock colors: crystal, green, red, blue, orange and pink in .088" and .098" string groove sizes.




A/C/G[™]

A/C/G sets the highest standards for parallel shaft performance. Suitable for all forms of outdoor and indoor archery, A/C/G is the "do it all" shaft with incredible precision, extreme durability and precision components to suit any archery need.

- High-strength carbon fiber bonded to a precision 7075 aerospace alloy core tube
- Polished carbon finish
- Guaranteed straightness: ± .002"
- Weight tolerance: ± 1.0 grain
- Components—*sold separately*

A/C/G INSERT AND POINT SYSTEM

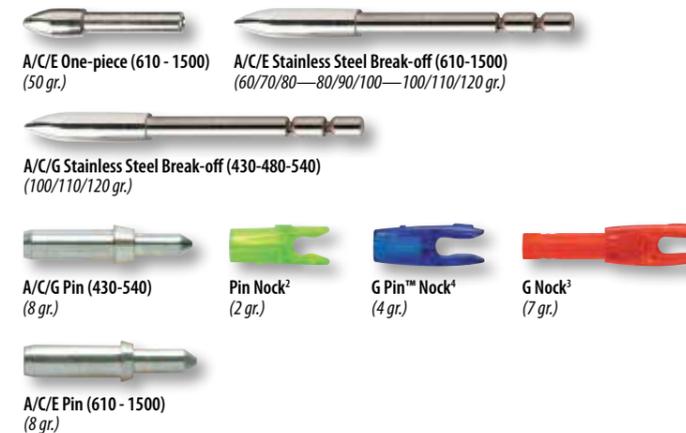

A/C/G[™] INSERT AND POINT SYSTEM 5-44 THREAD



A/C/E Insert	Screw-in Point				
Point Weight	#2-31gr.	#3-36gr.	#4-41gr.	#5-46gr.	#6-51gr.
Insert Weight	Total Weight (grains)—Insert and Point				
H - 39gr.	70	75	80	85	90
J - 49gr.	80	85	90	95	100
L - 59gr.	90	95	100	105	110

Size	Shaft Weight	Spine @ 28" Span	Stock Length	Recommended Point Weight Range
	Grains per Inch	Deflection in Inches	Inches	Grains
1500	4.7	1.500	28	50-70
1300	5.1	1.300	28½	50-70
1150	5.5	1.150	28½	50-70
1000	5.5	1.000	29	70-80
880	5.9	0.880	29½	70-80
810	6.1	0.810	30	80-90
710	6.5	0.710	30½	80-90
660	6.9	0.660	30¾	80-90
610	7.3	0.610	31	80-90
540 ¹	7.7	0.540	31½	100
480 ¹	8.4	0.480	32	100-110
430 ¹	8.9	0.430	32½	100-110

1 430, 480, 540 sizes use unique A/C/G point and nock pin. All others use A/C/E points and nock pins.
 2 Pin Nock colors: crystal, green, red, blue, orange, and pink in .088" and .098" string groove sizes.
 3 G Nock colors: black, white, green, orange, blue, deep red and red in .088" and .098" string groove sizes.
 4 G Pin Nock colors: crystal, green, red, blue, orange and pink.



A/C/C™

A/C/C is the enduring, proven favorite of shooters looking for high performance and surgical tolerances at a more affordable price. Custom components and tailored spines make for a perfect fit for any compound or recurve setup. Ideal in abusive European style target butts.

- High-strength carbon fiber bonded to a precision 7075 alloy core tube
- Polished carbon finish
- Guaranteed straightness: ± .002"
- Weight tolerance: ± 0.5 grains
- Components—sold separately

A/C/C INSERT AND POINT SYSTEM



Size	Shaft Weight	Spine @ 28" Span	Stock Length	Point/Insert Sizes	UNI ¹ System			One-Piece Parabolic Point			NIBB Point		RPS Inserts ⁴		O.D. In.
					Bush-ing	G Nock ²	Heavy Wt.	Med. Wt.	Light Wt.	Extra Light Wt.	Hyper Light Wt.	Two-piece	Halfout	Alum.	
	Grains per Inch	Deflec-tion in Inches	In.		Gr.	Gr.	Gr.	Gr. ³	Gr. ³	Gr. ³	Gr. ³	Gr. ³	Gr. ³	Gr. ³	
2-00	4.7	1.500	28	-00*	—	7	—*	50*	—*	—*	—	—	—	—	—
3L-00	5.1	1.300	28½	-00*	—	7	—*	50*	—*	—*	—	—	—	—	—
3-00	5.5	1.150	28½	-00*	—	7	—*	—*	50*	—*	—	—	—	—	—
2L-04	6.1	1.020	29	-04	2	7	100	80	70	60	50	—	—	—	—
2-04	6.5	0.920	29½	-04	2	7	100	80	70	60	50	—	—	—	—
3X-04	6.7	0.830	29½	-04	2	7	100	80	70	60	50	—	—	—	—
3L-04	7.0	0.750	30	-04	2	7	100	80	70	60	50	—	—	—	—
3-04	7.2	0.680	30	-04	2	7	100	80	70	60	50	—	—	—	—
3L-18	7.5	0.620	31	-18	3	7	—	100	82	70	60	70	16	—	17/64
3-18	7.8	0.560	31	-18	3	7	—	100	82	70	60	70	16	—	17/64
3-28	8.1	0.500	31½	-28	4	7	—	100	87	70	60	70	18	—	17/64
3-39	8.6	0.440	31½	-39	5	7	—	100	85	70	60	70	22	—	9/32
3-49	8.8	0.390	32	-49	6	7	—	—	100	80	70	80	—	9	9/32
3-60	9.5	0.340	32½	-60	7	7	—	—	108	90	80	90	—	11	5/16
3-71	9.9	0.300	33	-71	8	7	—	—	114	90	80	90	—	14	5/16

1 UNI—Universal Nock Installation System.
 2 G Nock available in black, white, green, blue, deep red, orange, red, and comes in .088" and .098" string groove sizes.
 3 NIBB Point grain weights are ±0.5 grains; all other components are ±1 grain.
 4 RPS—Replaceable Point System.
 5 RPS target points available in 50-125 grains.
 — Indicates not available.
 * A/C/C-00 sizes use the same size core tube as A/C/E shafts and may use all A/C/E points, inserts, and nocks.



Jim Easton literally grew up next to his dad Doug, playing with cedar chips in the workshop and helping with the construction of aviation map cases that Doug and Mary Easton produced to help in the American war effort of the 1940's. As Jim grew to adulthood, he and his brother Bob became respected archery competitors in their own right.

Doug & Jim Easton
Circa 1950

CARBON ONE™

Sets the mark in the all-carbon parallel target shaft category. For the highest level of outdoor competition, look no further than Carbon One.

- High-strength carbon fibers
- Micro-smooth finish
- Straightness: ± .003"
- Weight tolerance: ± 1 grain
- Components—sold separately
- Also uses A/C/E components



Size	Shaft Weight	Spine @ 28" Span	Stock Length	Point	Recommended Point Weight	Nock Pin Adapter	Nock
	Grains per Inch	Deflection in Inches	Inches				
1150	5.0	1.150	28 1/8		70-80		
1000	5.0	1.000	28 3/8	Carbon One	70-80	A/C/E	Pin Nock ¹ G Pin Nock ² G Nock ³
900	5.3	.900	28 3/4	90/80/70	80-90		
810	5.8	.810	29 1/8		80-90		
730	6.0	.730	29 3/4		90-100		
660	6.6	.660	30 3/8	Carbon One	90-100	Carbon One-1	Pin Nock G Pin Nock G Nock
600	6.9	.600	30 3/4	110/100/90	100-110		
550	6.9	.550	31 3/32		100-110		
500	7.4	.500	31 1/2		110-120		
450	8.1	.450	31 7/8	Carbon One	110-120	Carbon One-2	Pin Nock G Pin Nock G Nock
410	8.5	.410	32 3/32	120/110/100	110-120		

1 Pin Nock colors: crystal, green, red, blue, orange, and pink.
 2 G Pin Nock colors: crystal, green, red, blue, pink, and orange in .098" string groove size.
 3 G Nock colors: black, white, green, orange, blue, deep red, and red in .088" and .098" string groove sizes.




Jesse Broadwater (USA)

APOLLO™

Apollo is the all-carbon starter arrow with the tolerances and spine sizes needed to ensure a correct tune for every archer. Tough and durable, yet extremely precise, Apollo is the right shaft for the right start to your lifetime archery challenge.

- Micro-smooth finish
- Weight tolerance: ± 2.0 grain
- Guaranteed straightness: $\pm .005"$
- Components—sold separately

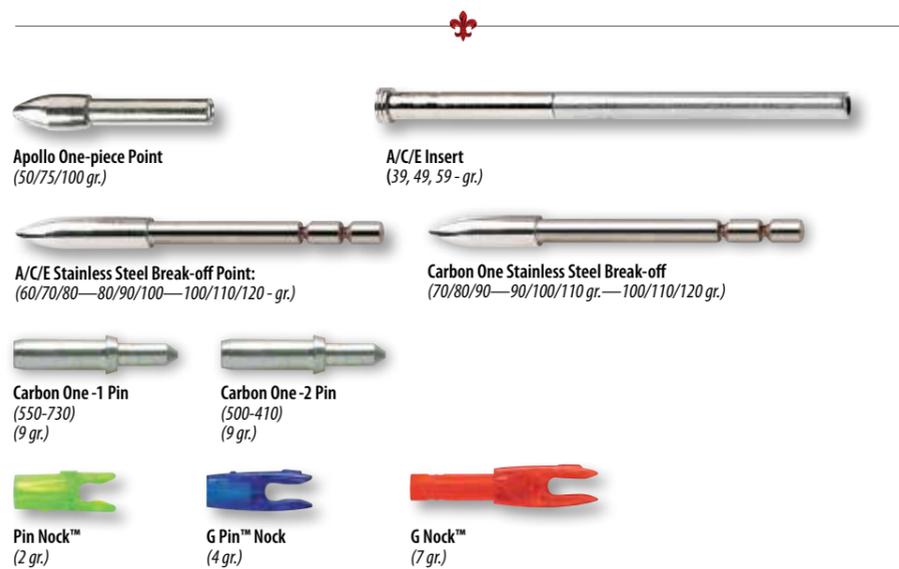


Size	Shaft Weight Grains Per Inch	Spine Deflection In Inches	Stock Length Inches	Recommended Point Size	Nock Pin Adapter	Nock
1200	5.5	1.200	27.5	Apollo	A/C/E	Pin Nock G Pin Nock G Nock
1070	5.9	1.070	28	1-Piece 50 Grain		
950	6.2	0.950	28.5			
840	6.5	0.840	29	Apollo	Carbon One - 1	Pin Nock G Pin Nock G Nock
740	7.2	0.740	29.5	1-Piece 75 Grain		
670	7.7	0.670	30			
610	8.1	0.610	30.5	Apollo	Carbon One - 2	Pin Nock G Pin Nock G Nock
560	8.4	0.560	31	1-Piece 100 Grain		



NEW INSPIRE™

Inspiré is a carbon shaft produced to the tightest tolerances at an affordable price. Inspiré is accurate and durable, with precision components and a wide range of spines tailored for the beginning archer of any age.

- Small-diameter, micro-smooth carbon finish
- G Nock or X Nock—included
- Available in seven sizes
- Zinc one-piece points

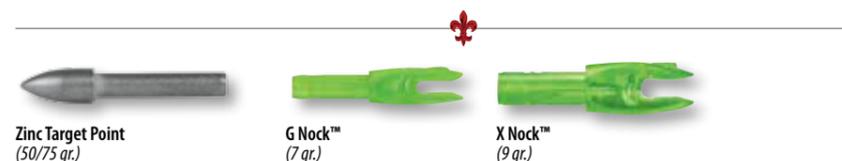

Size	Shaft Weight Grains per Inch	Spine @ 28" Span Deflection in Inches	Minimum Stock Length Inches	Glue-In Point Grains	Nock
1400	6.7	1.400	27	50	G
1200	7.2	1.200	27 ^{1/4}	50	G
1000	7.2	1.000	27 ^{1/2}	50	G
900	7.7	0.900	28 ^{1/2}	50	G
750	8.1	0.750	29 ^{1/2}	50	G
630	7.9	0.630	30 ^{1/2}	75	X
570	8.2	0.570	31 ^{1/2}	75	X



As Jim Easton applied his fertile mind to the same challenges Doug had tackled over the decades, he revolutionized the sport, including initiating the first use of carbon fiber in sporting goods, in the 1960's.

NEW TRIUMPH™

Triumph is the World Archery Maximum Diameter indoor competition shaft that sets new standards for accuracy and durability for composite shafts. Triumph combines a precision carbon shaft with an internal aluminum reinforcement on the point end to withstand even the toughest European target butt materials. With four spine choices and five point combinations, Triumph is the most sophisticated indoor compound shaft ever developed.

- All four sizes made to max 23 O.D.
- Built-in 7% F.O.C.
- Front reinforcement for durability
- Multi-layer carbon fiber and 7075 alloy
- Straightness $\pm .002"$
- Weight tolerance: ± 1 grain
- Super or G UNI bushings—*included*
- Components—*sold separately*



Triumph Point



G-UNI Bushing[®]



Super UNI Bushing[®]



Pin Adapter
(13 gr.)



G Nock™



Super Nock[®] or 3D Super Nock[®]



Pin Nock™
(2 gr.)



G Pin™ Nock[®]
(4 gr.)



MicroLite™ Super Nock[®]

Size	Shaft Weight @ 28"	Spine @ 28" Span	Minimum Stock Length	Super Nock	Micro Super Nock	Super ¹ UNI Bushing	G Nock ²	G ¹ UNI Bushing	One-piece Point
	Grains	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains
500	279	0.500	30¼	13	8	12	7	16	100/125/150/175/200
450	290	0.450	30¾	13	8	12	7	16	100/125/150/175/200
400	298	0.400	31¼	13	8	11	7	15	100/125/150/175/200
350	312	0.350	31¾	13	8	11	7	15	100/125/150/175/200

¹ Super or G-UNI Bushing supplied uninstalled.

² G Nock available in black, white, green, orange, and red, and comes in .088" and .098" string groove sizes



*Triumph meets the maximum diameter restriction for World Archery Tournaments.

Erika Jones (USA)

FAT BOY™

Fat Boy is the World Archery 9.3mm diameter regulation conformal shaft with all of the precision needed for target performance and the durability to handle tough target butts. Fat Boy's proven precision has put shooters on the podium across the globe in indoor competition.

- Specifically engineered for indoor and 3D
- 23/64" (9.3mm) outside diameter
- Multi-layer wrapped carbon fibers
- Smooth matte black finish
- Straightness: $\pm .003"$
- Weight tolerance: ± 2.0 grains
- Super or G-UNI bushings—*installed*
- Inserts, points and nocks—*sold separately*



One-piece Bullet Point



RPS Point



FatBoy Insert



G-UNI Bushing[®]



G Nock™



Super UNI Bushing[®]



Super Nock[®] or 3D Super Nock[®]



MicroLite™ Super Nock[®]

Size	Shaft Weight	Spine @ 28" Span	Minimum Stock Length	Super Nock	Micro Super Nock	Super ¹ UNI Bushing	G Nock ³	G ¹ UNI Bushing	FatBoy RPS Insert	One-piece Point	RPS Point ²
	Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	Grains	Grains	Grains	O.D. Inches
500	7.1	0.500	31½	13	8	9	7	13	40	80/100	1½/32
400	7.8	0.400	32	13	8	9	7	13	40	80/100	1½/32
340	8.3	0.340	33¼	13	8	9	7	13	40	80/100	1½/32

¹ Super or G-UNI Bushing factory installed.

² RPS screw-in points available in 50-125 grains.

³ G Nock available in black, white, green, orange, and red, and comes in .088" and .098" string groove sizes.



*FatBoy meets the maximum diameter restriction for World Archery Tournaments.

Rick van der Ven (NED)

ALLOY

X²3™ & X²7™

X²7 is THE competition shaft for ultimate performance in indoor archery events (such as The Vegas Shoot) where regulations allow a maximum diameter 27 class shaft. Incredible strength and an unmatched performance record at the world's most prestigious indoor events.

X²3 is the 23 size shaft optimized for maximum diameter, indoor, World Archery regulation competition. The sleek, classic, diamond polished anodize silver finish is distinctive on the line and in your quiver. Precision and proven X7 alloy performance.

- 7178-T9 aerospace alloy diamond polished anodized silver finish
- Guaranteed straightness: ± .001"
- Weight tolerance: ± 3/4%
- Strength (PSI): 105,000
- Components—sold separately



One-piece zPoint



Super UNI Bushing®



Super Nock®
13 gr



MicroLite™ Super Nock®
8 gr.



3D Super Nock®
13 gr

Model	Shaft Size	Shaft Weight	Spine @ 28" Span	Stock Length	UNI Bushing	Super Nock	RPS Insert	One-PiecePoint	RPS Point
		Grains per Inch	Deflection in Inches	Inches	Grains	Grains	Grains	Grains	O.D. Inches
X ² 3	2312	9.5	0.423	33	11	13	37	100	11/32
X ² 3	2314	10.8	0.391	33.5	10	13	34	100	11/32
X ² 3	2315	11.8	0.340	34	11	13	37	100	11/32
X ² 7	2712	11.3	0.260	34.5	19	13	—	150/300	—

• Super UNI Bushing—installed • Nocks and points—sold separately



X7 ECLIPSE™

Eclipse is built with the highest level of factory precision. Impeccable spine, weight and straightness tolerances give indoor shooters the most accurate tool to achieve the highest scores possible. It's the ultimate choice when precision counts.

- 7178-T9 aerospace alloy
- Hard-anodized black finish
- Guaranteed straightness: ± .001"
- Weight tolerance: ± 3/4%
- Strength (psi): 105,000



NIBB Point



RPS Point



One-piece Bullet Point



RPS Insert



G-UNI Bushing®
(for sizes 1914 and smaller)



G Nock™
(for sizes 1914 and smaller)



Super UNI Bushing®



3D Super Nock®
13 gr



MicroLite™ Super Nock®
8 gr

Sizes: 1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413, 2511, 2512, 2612, 2613, 2712

• G-UNI or Super UNI Bushing—installed • Nocks and points—sold separately



ALLOY

When it comes to sheer accuracy, nothing matches the X7 shaft. For fifty years, archers across the globe have depended on the X7 when everything is on the line. From Olympic victories, to last season's Vegas sweep and a fifty year history, X7 is the single most successful sporting goods product in modern history.

ECLIPSE



LARGE DIAMETER CARBON

NEW SUPERDRIVE™ 25

SuperDrive is the 25 diameter carbon performance shaft for shooters looking for success on the 3D course. Strong, light and durable, SuperDrive is the fastest path to the winner's circle.

- Straightness: ± .002"
- Weight tolerance: ± 1 grain
- 25/64" outside diameter
- Specifically engineered for indoor and 3D
- Black, smooth matte finish
- Multi-layer wrapped carbon fiber
- Super or G UNI bushings—*included*
- Inserts, points, and nocks—*sold separately*
- Pin Adapter—*sold separately*



G-UNI Bushing®



G Nock™



SuperDrive One-piece Point



Super UNI Bushing



Super Nock®



MicroLite™ Super Nock



Pin Adapter



Pin Nock™
(2 gr.)



G Pin™ Nock®
(4 gr.)

Size	Shaft Weight Grains per Inch	Spine @ 28" Span Deflection in Inches	Minimum Stock Length Inches	Super Nock ¹ Grains	Microlite ² Super Nock Grains	Super UNI Bushings Grains	G Nock ³ Grains	G UNI Bushings Grains	Pin Nock Adapter Grains	One-piece Point Grains
290	7.8	0.290	32	13	8	16	7	18	15	100/125

¹ Super Nock available colors: green, orange, yellow, white, and black. 3D Super Nock available colors: orange, white, and black


² MicroLite Super Nock available colors: blaze, emerald, yellow, smoke, and red

³ G Nock available in black, white, blue, deep red, green, orange, and red, and comes in .088" and .098" string groove sizes.

microLite™ SUPERLITE-CARBON™

UNI[®]
BUSHING

Darrin Christenberry

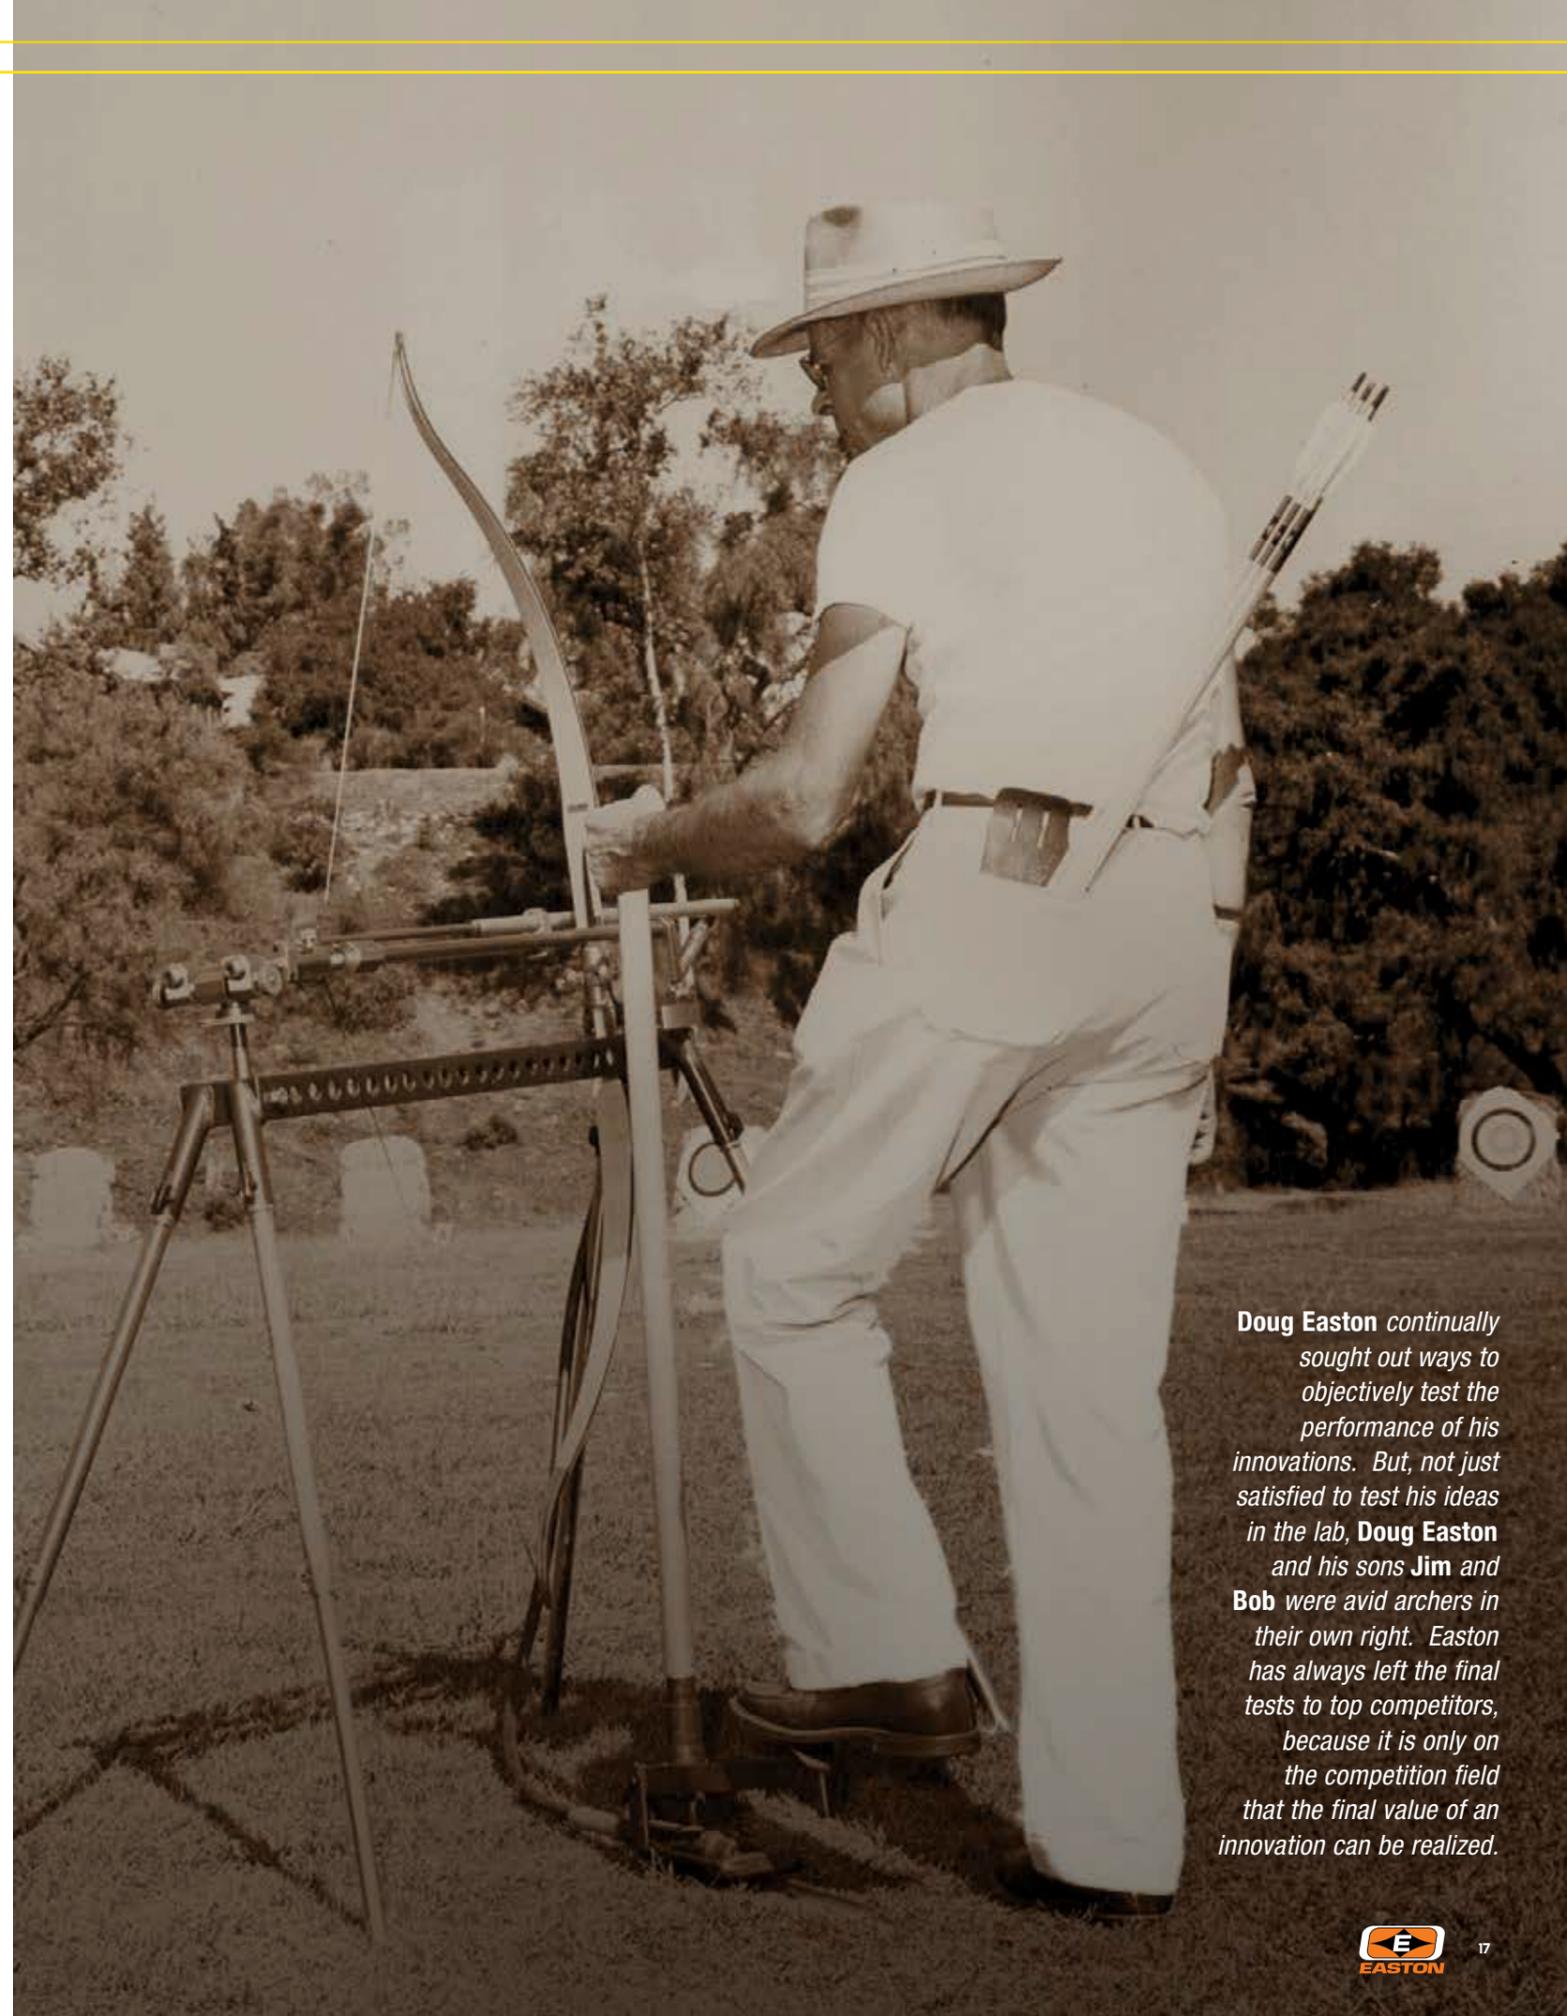


Doug Easton continually sought out ways to objectively test the performance of his innovations. But, not just satisfied to test his ideas in the lab, Doug Easton and his sons Jim and Bob were avid archers in their own right. Easton has always left the final tests to top competitors, because it is only on the competition field that the final value of an innovation can be realized.



FULL BORE™

Full Bore's 27-class diameter for line-catching performance in NFAA and 3D competition. Tough, reliable, multilayer all-carbon construction for premium performance and long lasting accuracy.

- Straightness: ± .003"
- Weight tolerance: ± 2 grains
- 27/64" outside diameter
- Specifically engineered for indoor and 3D
- Black, smooth matte finish
- Multi-layer wrapped carbon fibers
- Super or G UNI bushings—*included*
- Inserts, points, and nocks—*sold separately*

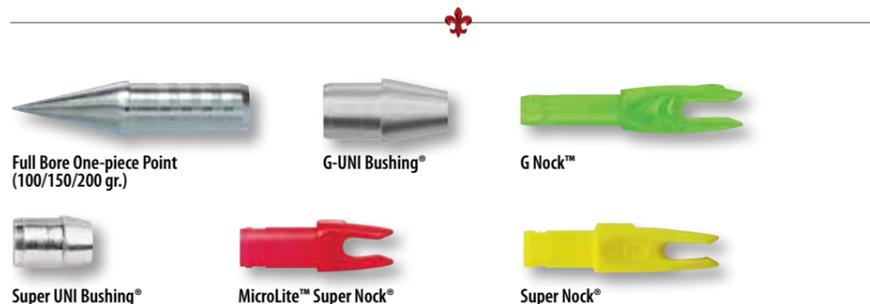

Size	Shaft Weight Grains per Inch	Spine @ 28" Span Deflection in Inches	Minimum Stock Length Inches	Super Nock ¹ Grains	MicroLite ² Super Nock Grains	Super UNI Bushing Grains	G Nock ³ Grains	G UNI Bushing Grains	One-piece Point Grains
350	8.4	0.350	32	13	8	19	7	21	100/150/200
270	9.0	0.270	32.125	13	8	19	7	21	100/200/250


¹ Super Nock available colors: green, orange, yellow, white, and black. 3D Super Nock available colors: green, orange, white, and black
² MicroLite Super Nock available colors: blaze, emerald, yellow, smoke, and red
³ G Nock available in black, white, blue, deep red, green, orange, and red, and comes in .088" and .098" string groove sizes.

microLite™ SUPERLITE-CARBON™ UNI BUSHING

LIGHTSPEED™ & LIGHTSPEED 3D™

Lightspeed and Lightspeed 3D feature Feather weight all-carbon construction for a superior 3D and indoor high-speed target shaft. A performance-oriented weight range make Lightspeed forgiving and precise.

- Multi-layer wrapped carbon fibers
- Smooth matte black finish
- 3D straightness: ± .001"
- LightSpeed straightness: ± .003"
- Weight tolerance: ± 2 grains
- G-UNI Bushing—*installed*
- Point—*sold separately*
- G Nock—*sold separately*

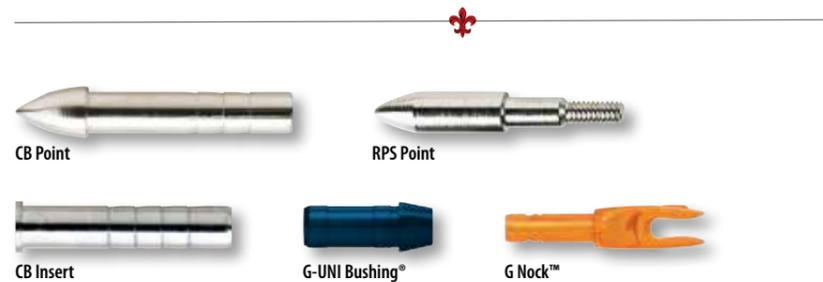

Size	Shaft Weight Grains per Inch	Shaft Weight @ 29" Grains	Spine @ 28" Span Deflection in Inches	Stock Length Inches	UNI Bushing ¹ Grains	G Nock Grains	CB Insert Grains	CB Point ² Grains	RPS Point O.D. Inches
500	6.5	189	0.500	31 1/2	12	7	21	80/100	932
400	7.4	215	0.400	32	12	7	21	80/100	932
340	8.2	238	0.340	32 1/2	12	7	21	80/100	516

¹ G-UNI Bushing factory installed. Note: one-size CB Insert and CB Point fits all LightSpeed shaft sizes.
² RPS screw-in points, available in 50-125 grains.

SUPERLITE-CARBON™ UNI BUSHING


Jim Easton 1953

Cara Fernandez (USA)

XX75[®] PLATINUM[®] PLUS

Platinum Plus is a premium, intermediate priced shaft for all levels of recreational and competitive archery.

- 7075-T9 aerospace alloy
- Hard-anodized finish
- Guaranteed straightness: ± .002"
- Weight tolerance: ± 1%
- Strength (psi): 96,000

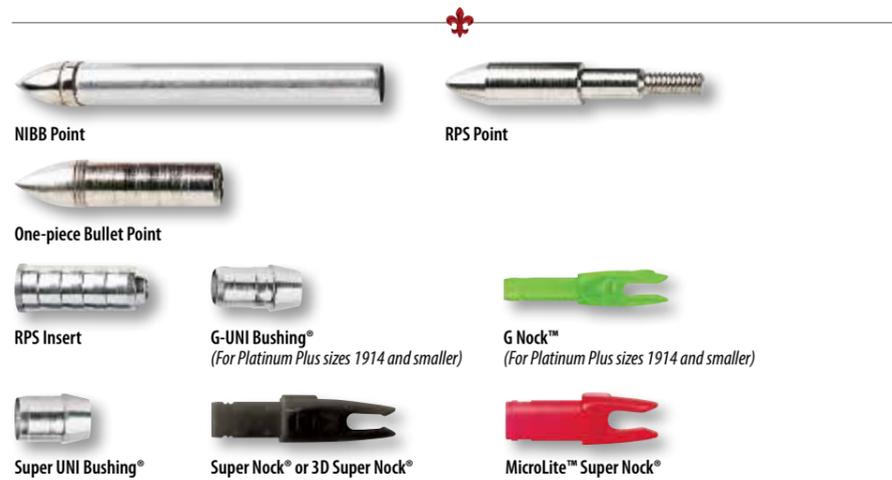

Sizes: 1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315

• G-UNI or Super UNI Bushing—installed • Nocks and points—sold separately



TRIBUTE[™]

Tribute is a target shaft constructed with Easton's proprietary XX75 alloy. Durable, accurate and economical, Tribute is the stepping stone to high performance for any beginning or shorter-draw, lighter poundage archer.

- 7075 aerospace alloy
- Hard-anodized black finish
- Guaranteed straightness: ± .005"
- Weight tolerance: ± 2%
- Strength (psi): 90,000
- Precision-ground nock swage



Sizes: 1214, 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016

• Components—sold separately • Precision-ground nock swage



XX75[®] JAZZ[®]

Jazz features all the accuracy benefits of XX75 alloy and comes in sizes all the way down to 1214 to outfit any beginning archer.

- 7075 aerospace alloy
- Hard-anodized finish
- Guaranteed straightness: ± .005"
- Weight tolerance: ± 2%
- Strength (psi): 90,000
- Precision-ground nock swage



Sizes: 1214, 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016


• Components—sold separately • 1214 size uses the direct-fit G Nock



NEOS[™]

Legendary 7075 alloy quality, Neos comes in the durable 1618 size, the ideal spine for leisure and beginner archers shooting lighter-weight bows.

- 7075 aerospace alloy
- Hard-anodized gold
- Guaranteed straightness: ± .008"
- Weight tolerance: ± 5%

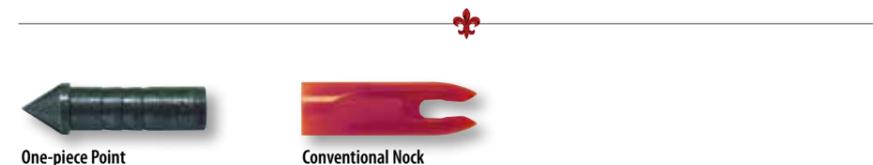

Size: 1618

• Components—sold separately



Behind every great man is a great woman. **Mary Easton**, Doug's wife of more than 50 years, worked in the California factory alongside **Doug** handling accounting and payroll. She knew the name of every employee until her retirement in the 1990's, even though there were hundreds of Easton workers by that time. Mary was also an avid archer and often tested the accuracy of **Doug's** innovations.

XX75 ALLOY

XX75[®] GENESIS[™]

The only arrow approved by NASP for tournament use.
Economical, accurate and durable. New green color now available.

- 7075 aerospace alloy
- Hard-anodized
- Guaranteed straightness: $\pm .005"$
- Weight tolerance: $\pm 2.5\%$
- Strength (psi): 90,000
- UNI bushing—*installed*



One-piece Point



G-UNI Bushing[®]



N Nock[™]

Size: 1820

• Colors—cobalt blue, orange and NEW green



Genesis is a trademark of Genesis Archery

XX75[®] BEGINNER

The name says it all. When it comes to accuracy, fun and quality, the XX75 Beginner shaft is a great solution for lightweight starter bows.

- 7075 aerospace alloy
- Hard-anodized
- Guaranteed straightness: $\pm .005"$
- Weight tolerance: $\pm 2.5\%$
- Strength (psi): 90,000
- UNI bushing—*installed*



One-piece Point



Conventional Nock

Size: 1816

• Colors—black & pink



Archery has always been a family sport. Age, physical strength, and gender all are made equal by the flight of the arrow.

STABILIZERS

NEW



CONTOUR™

All-new Contour stabilizer uses a complex carbon fiber to damp out post-shot vibration while providing an unmatched aiming experience even in crosswinds. The Windcutter-360™ design of Contour promotes a steady confidence in crosswinds while the large-diameter base promotes enhanced vibration reduction with no need for rubber decouplers. Light and efficient, Contour is compatible with 1/4"-20 weight systems or 5/16"-24 flat vari-weights for competitors seeking the most compact setup.

- Optimized high stiffness for steady aiming
- Tri-Mod AVID™ (Advanced Vibration Integrated Damping) Geometry for shock management
- 360° Windcutter™ profile reduces wind effect

	CONTOUR Stabilizer				CONTOUR Side Rod			CONTOUR V-Bar Extender		
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm	4 in-10 cm	5 in-13 cm	6 in-15 cm
Ounces	3.7	4.0	4.3	4.6	2.5	2.7	2.9	2.3	2.4	2.5
Grams	106	114	123	131	71	75	83	66	69	72



Contour Stabilizer comes with a reusable protective sleeve

NEW



Z FLEX™

All-new Z-Flex provides extreme stiffness and high-moment weight system compatibility with minimum aiming float. AVRS™ chamber for rapid vibration amplitude dissipation after the shot. Z-Flex is compatible with 5/16"-24 flat vari-weights.

- Ultra-stiff design for steady aiming
- AVRS damping for active-shock management
- Lowest mass and highest efficiency

	Z-FLEX Stabilizer				Z-FLEX Side Rod			Z-FLEX V-Bar Extender		
Size	24 in-61 cm	27 in-69 cm	30 in-76 cm	33 in-84 cm	10 in-25 cm	12 in-30 cm	15 in-38 cm	4 in-10 cm	5 in-13 cm	6 in-15 cm
Ounces	5.8	6.2	6.5	6.9	3.2	3.5	3.9	2.5	2.7	2.8
Grams	164	175	186	196	92	99	111	72	75	79



5/16 adjustable weight stud included — not installed

Z Flex Stabilizer comes with a reusable protective sleeve

NEW



A/C™ PRO

Easton's technologically advanced A/C Pro stabilizers are among the most efficient stabilizers yet developed. Featuring the incredible stiffness of high-modulus carbon fiber and the high-frequency response preferred by top archers across the globe, the Ultra-High Resonance A/C Pro stabilizer is equipped with proven, low-mass AVRS system. From Olympic and World Championship podiums to the top of the local league leader board, A/C Pro is proven across the globe. A/C Pro is compatible with 1/4"-20 weight systems or 5/16"-24 flat vari weights.

- Time-Tested A/C Construction
- AVRS Damping System for Shock Management
- Stiff Design for Steady Aiming

	A/C PRO Stabilizer			A/C PRO Side Rod		
Size	24 in-61 cm	29 in-74 cm	34 in-86 cm	9 in-23 cm	10 in-25 cm	11 in-28 cm
Ounces	4.3	5.0	6.0	1.7	1.8	1.9
Grams	122	142	170	48	51	54



STABILIZER COMPONENTS

Exclusive maximum-duty designs cope with the heaviest mass-weight stacks and highest-energy bows. Supreme strength locking bolts provide reliable holding power and no surprises. Meticulously machined from high-strength alloys with precision laser marking for repeatable indexing.

MOUNTS

FIXED V-BAR WITH BOLT

- Works with all Easton stabilizer systems
- Black hard-anodize finish
- 35° flat and 35° X 17° down-angle models
- 5/16" stainless-steel connector bolt— included

NEW

ADJUSTABLE V-BAR WITH BOLT

- Infinite adjustability
- Machined gears in joint for solid lockdown
- Suitable for compound or recurve bows
- Stainless steel eye bolt included

NEW

ADJUSTABLE SIDE ROD ADAPTER

- Infinite adjustability
- Machined gears in joint for solid lockdown
- Stainless steel eye bolt included

NEW

CONTOUR AND Z-FLEX CONNECTOR BOLT

- Cleanly interfaces V-bars to extenders or bows
- Flush, nested fit for Contour or Z-Flex rods
- Lightweight aluminum alloy, hard anodized finish
- Thru-hole for wrench lockdown



VARI WEIGHTS

Mix and match any combination of Flat Weights for custom balance, aiming, and aesthetics.



ORIGINAL VARI-WEIGHTS 1/4-20 THREAD


	Ounces	Grams
Module	1.5	43
1/2 Module	0.75	21
Cap	1.5	43



FLAT VARI-WEIGHTS 5/16-24 THREAD

	Ounces	Grams
Contour Base	2.0	57
Z Flex Base	2.0	57
1 Oz.	1.0	28.5
2 Oz.	2.0	57
4 Oz.	4.0	114

NEW

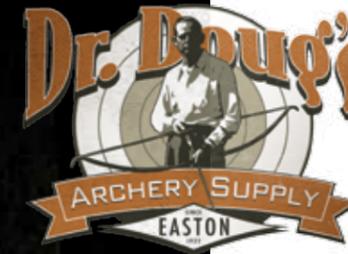

DR. DOUG'S™ TOOLS AND SUPPLIES

In the spirit of the man who shaped modern archery. Doug Easton's legacy of innovative genius continues today in the full line of "Dr. Doug's" products.

QUICKBOND™ INSERT ADHESIVE

- Easy to identify orange color
- Impact resistant
- Ready to shoot in 15-30 minutes
- Sizes: 0.5 FL oz. and 1.0 FL oz.

QUICKBOND™ VANE ADHESIVE

- Ultimate strength
- Bonds in seconds
- Primer Pen compatible
- Sizes: 0.5 FL oz. and 1.0 FL oz.

FASTSET™ VANE GEL

- Sizes: 3 gram and 9 gram

QUICKBOND™ VANE PRIMER PEN

- Compatible with all vane adhesives
- Improves bond strength & reduces drying time
- Improves adhesion for hard-to-stick vanes

FLECHTITE® PLATINUM

- Size: 22-gram tube

24-HOUR INSERT EPOXY SYRINGE

- Provides a permanent bond
- Flexible, non-brittle formula

DR. DOUG'S™ 3-STEP BOWSTRING MAINTENANCE KIT

- String Cleaner—removes dirt, wax & contaminants from bowstring
- Bowstring Revitalizer—restores color & penetrates to the core of the string for reduced friction and maximum shot life
- Full Synthetic Bowstring Wax—protects longer & better than conventional waxes

QUICKBOND™ ARROW BUILDING & REPAIR KIT

- Complete vane and insert adhesive kit—enough for a dozen arrows.
- Orange – Quickbond Insert Glue
- Clear – Quickbond Vane Adhesive
- Red – VC-3 Threadlocker
- Low Temperature Hotmelt Stick

CONVENTIONAL BOWSTRING WAX

- Protects bowstring from wind and weather
- Specially formulated for modern bowstring materials

HOT MELT ADHESIVE

- Low temperature
- 3" x 1/2" stick

VC3® THREAD LOCKER

- Unique reusable formula.
- Apply to broadheads, practice points, & bow accessories for solid mounting and reduced vibration.

VC-3 is a registered trademark of ND Industries, Inc.



Doug developed more than just the modern archery arrow, he also developed the processes and machines required to make them. One example of these was the lube formula integral to the aluminum cold-drawing process still employed today.

DR. DOUG'S™ TOOLS AND SUPPLIES

DR. DOUG'S™ FULL-SYNTHETIC ARROW LUBE

- Full-synthetic formula makes for easy arrow extraction
- Scent free, easy to apply
- Suitable for all types of arrows
- Most advanced arrow lube ever created
- Quiver-mount neoprene sleeve included



ARROW PULLER WEDGE

- Proprietary compound for maximum arrow grip
- Internal-molded sides for improved wet-weather pulling
- Ergonomic wedge shape for comfortable fit



ARROW PULLER PUCK

- Proprietary high-grip compound for maximum arrow grip
- Flat puck design for maximum grip leverage



PRO HEX FOLD UP SET - STD

Standard Sizes: 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64, 1/16, .050



PRO HEX FOLD UP SET - XL

XL Sizes: 1/4, 7/32, 3/16, 5/32, 9/64, 1/8, 7/64, 3/32, 5/64



PRO HEX FOLD UP SET - METRIC/STANDARD COMBO SET

Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, Metric: 1.5, 2.5, 3.0, and 2.8 flat blade



PRO HEX STUBBY 10 PCS. SHORT L SET - XL

- Short arm design for reaching into tight fitting screws
- Perfect for working around sights & rests
- XL Sizes: 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4



PRO HEX LIMB MASTER

- Long arm hex wrench installed in comfortable molded rubber handle
- Perfect for adjusting limb bolts
- Sold individually
- Sizes: 7/32, 3/16, 1/4



PRO ARCHERY NEEDLE NOSE PLIERS

- A must for any serious bow mechanic



ELITE NOCK AND D-LOOP PLIERS

- Convenient and versatile archery tool
- Patent-pending dual-jaw design
- Maximizes mechanical advantage for tightest possible D-loops
- Six tools in one



UNIVERSAL NOCK TOOL

- Handy design allows for installation and removal of all nock sizes
- Includes a threaded shank for easy removal of broken nocks



BROADHEAD WRENCH

- For safe installation & removal of broadheads from arrows



(A) NEW



(B) NEW




(C) NEW



(D) NEW



(E) NEW

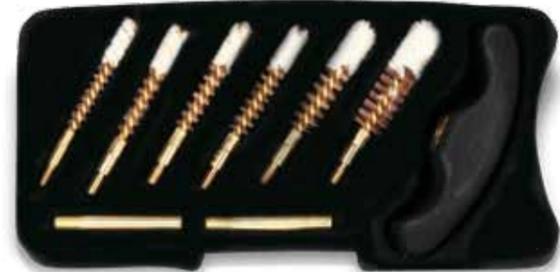

(A) PRO SHOP TOWELS

- Durable and disposable lint free towel especially suited for preparing arrow shafts for fletching and point installation

(B) BOW STRINGER

- Molded rubber-cupped stringer for easy and recommended stringing of target recurve bows

(C) BCY NOCK & PEEP SERVING

- .020" nylon thread perfect for tying nock sets and peep sights.
- Includes 1m red thread & 1m black thread

(D) BCY POLYGRIP CENTER SERVING THREAD

- .020" polyester thread perfect for center serving
- 75 yard spool

(E) BCY #24 D-LOOP ROPE

- The professionals' choice and #1 choice of archers worldwide
- Stiff-braided poly fibers
- Good, consistent burn
- 1m length

BCY is a trademark of BCY Bowstring.

T-BOW SQUARE & L-BOW SQUARE

- Lightweight, strong aluminum
- Precision laser-etched rule
- Critical for precise bow tuning & set up

9-PIECE ARROW PREP TOOL KIT

- Innovative kit cleans and abrades the interior shaft surface for proper point adhesion and maximum bond strength
- 9-piece kit fits all sizes of arrow shafts from G to Max 27 diameters

ARCHERY ESSENTIALS 12-PIECE PRO SHOP TOOL KIT & 8-PIECE VALUE PACK

Kit items save 30% versus items sold separately. Both kits include a zippered Case Cube that comes with peel-off hook and loop panel to attach to bow cases with fleece-lined interiors.

Both Kits Include:

- Extra Large Folding Allen Wrench Set
- Nock Installation and Removal Tool
- Wedge Arrow Puller
- Zippered Case Cube
- Bowstring Wax
- Serving Thread
- D-Loop Rope
- Broadhead Wrench

12-Piece Kit Adds:

- D-Loop Pliers
- Bow Square- L Model
- Small Folding Allen Wrench Set
- Arrow Prep Tool Kit

VANES & FEATHERS

Arrow accessories designed for performance and customization.

BTV™ CROSSBOW VANES

- Height and profile designed specifically for high-powered crossbows
- Stiffening ridge cuts flutter at high speeds
- Increases accuracy and tightens broadhead groups



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
300	3.00	.500	10	<ul style="list-style-type: none"> Bright Green Yellow Red Fire Orange White 	Clamshell or 100-count bag

All weights are within ±0.5 grain.

Diamond vanes®



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
175	1.750	.375	3	<ul style="list-style-type: none"> Bright Green Sunset Gold Yellow Fire Orange White Black 	Clamshell or 100-count bag
235	2.375	.375	4		
280	2.875	.500	6		
380	3.875	.500	8		

All weights are within ±0.5 grain.

XPV™ vanes

High performance for broadhead use



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
200	2.00	.568	6	<ul style="list-style-type: none"> Bright Green Red Yellow Fire Orange Hot Pink White Blue 	100-count bag 500-count box

All weights are within ±0.5 grain.

TITE FLIGHT™ vanes


Special rib adds stiffness to cut in-flight flutter and noise.



Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
175	1.750	.375	3	<ul style="list-style-type: none"> Bright Green Black Yellow Fire Orange Hot Pink White 	100-count bag
200	2.000	.330	4		

All weights are within ±0.5 grain.

FEATHERS

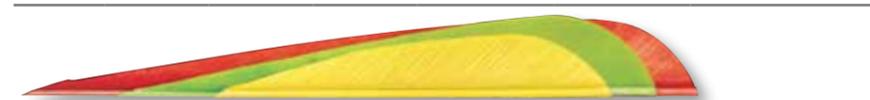

Size	Length (Inches)	Height (Inches)	Weight (Grains)	Colors	Packaging
3.0 R	3.000	.400	1.3	<ul style="list-style-type: none"> Black Blue Brown Yellow FL Green Gray Orange Red White Yellow Chartreuse 	Clamshell or 100-count bag
4.0 R	4.000	.550	2.8		
5.0 R	5.000	.600	4.5		

All weights are within ±0.5 grain.

SPIN WINGS & CRESTING

SPIN WING VANES®




1.75-inch vanes in black, white, blue, red, and yellow

Available in right or left

Packaging - 50-count bag


Colors ● Black ○ White ● Blue ● Red ● Yellow

DIAMOND™ ARROW CRESTS

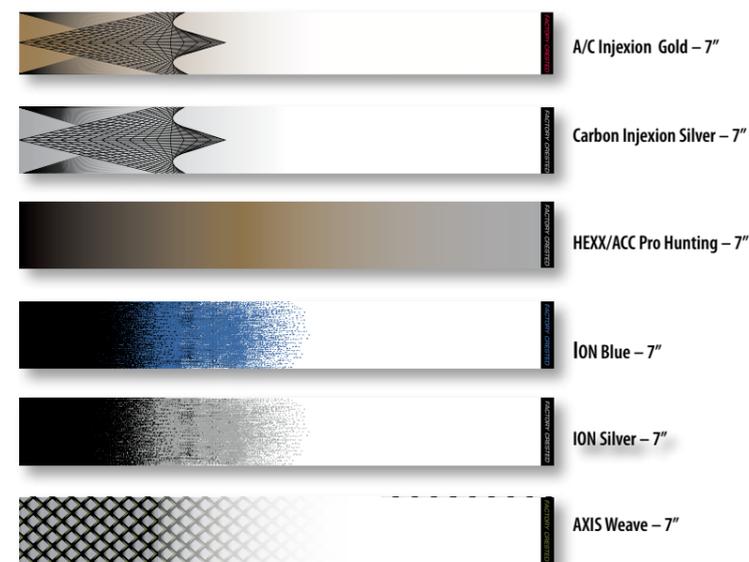

- Tube design for easy shrink application
- Applies in seconds using hot water
- No messy removal process

EASTON QUIKFLETCH® CRESTS

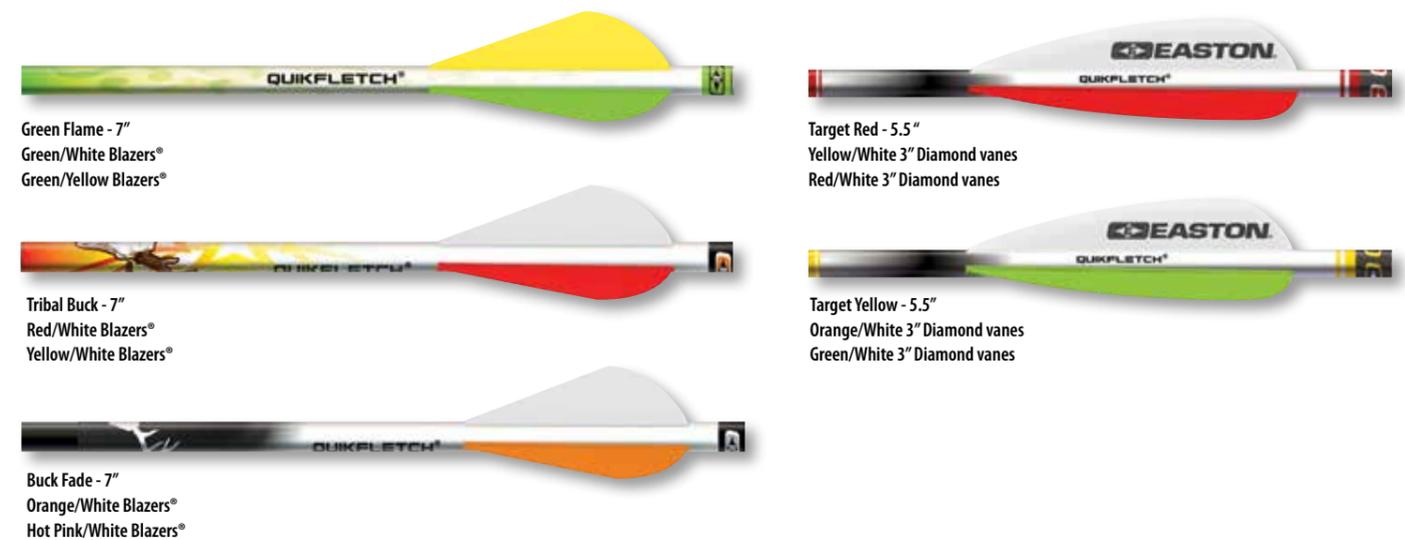

Target Red - 5.5"
Yellow/White 3" Diamond vanes
Red/White 3" Diamond vanes

Target Yellow - 5.5"
Orange/White 3" Diamond vanes
Green/White 3" Diamond vanes

Quikfletch is a registered trademark of Quikfletch LLC.

QUIVERS

RANGE LITE™ HIP QUIVER

- Lightweight design
 - Molded shank and arrow separator
 - Easy-access pockets
 - Top pocket for releases, pens or smart phones
 - Available in right or left hand configurations
 - Internal pocket dividers
- Colors: Realtree Xtra®, Silver, Red, Blue, and new Pink



QF50™ FIELD QUIVERS

- Sturdy nylon and molded foam body for lightweight strength
 - Zippered external pocket
 - Internal pocket dividers
 - Bow square slot
 - D-rings
 - Molded arrow separators
 - Available in right or left hand configurations
- Colors: Realtree Xtra®, Silver, Red, Green, Blue, Purple, and new Pink



QH100™ HIP QUIVERS

- Sturdy nylon and molded foam body for lightweight strength
 - Oversize compartments
 - Zippered external pocket
 - Internal pocket dividers
 - Top pocket for releases, pens, or smart phones
 - Bow square slot
 - D-rings
 - Molded arrow separators
 - Available in right or left hand configurations
- Colors: Realtree Xtra®, Silver, Grey, Red, Green, Blue, Purple, and new Pink



PRO TOUR™ HIP AND FIELD QUIVER

- Preferred Choice of Outdoor Target Archers
- Constructed of advanced technical fabrics for lightweight handling and superior durability
 - Engineered polymer arrow separator
 - Oversized storage compartments
 - Internal pocket organization system
 - Magnetic closure, easy-access pocket



FLIPSIDE™™ 2-TUBE CROSSBOW HIP QUIVER

- Innovative design fits both right and left-hand shooters
 - Designed specifically for crossbow arrows
 - Stainless steel belt clip attachment
- Colors: Black, and Realtree Xtra™



FLIPSIDE™™ 2-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters —for wear on either side
 - Rugged high-denier POLY construction
 - Stainless steel belt clip attachment
 - Durable injection-molded arrow separator tubes
- Colors: Realtree Xtra®, Black, Red, Blue, Pink, new Purple, Realtree Max-1™, Realtree Max-1™ and Lost Camo™



FLIPSIDE™™ 3-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
 - Reversible hook-and-loop pocket for wear on right or left side
 - Rugged high-denier POLY construction
 - Stainless steel belt clip attachment
 - Integrated accessory attachment grommet
 - Durable injection-molded arrow separator tubes
 - Integrated T-square slot
- Colors: Realtree Xtra®, Black, Red, Blue, Pink, new Realtree Max-1™, Purple, and Lost Camo™



FLIPSIDE™ 4-TUBE HIP QUIVER

- Innovative design fits both right and left-hand shooters
 - Includes one-size-fits-most adjustable quiver belt
 - Rugged high-denier POLY construction
 - Reversible hook-and-loop upper and lower pockets for wear on right or left side
 - Durable injection-molded arrow separator tubes
 - Integrated T-square and pen/pencil slots
 - Multiple accessory attachment rings
- Colors: Black, Red, Blue, Pink, Realtree Xtra®, new Purple, Lost Camo™, and Realtree Max-1™

QUIVER BELT

Sizes: Small (18"-30") Medium (28"-40") Large (38"-50")



REPLACEMENT BELT CLIP

REPLACEMENT FLIPSIDE ARROW TUBE



BOW CASES

GENESIS® 4014 BOW CASE

- Custom tailored for the Genesis compound bow
 - Rugged high-denier POLY construction with thick interior padding
 - Premium zippers with easy-grab pulls
 - Integrated Easton arrow-tote attachment straps
 - Exterior mesh accessory pocket
- Colors: Red, Pink, Blue, Black and Lost® Camo



MICRO FLATLINE™ 3617 BOW CASE

- Modern designed bowcase for maximum protection and space saving compact size
 - Rugged high-denier POLY construction with thick interior padding
 - Premium zippers with easy grab pulls
 - Fits most bows; interior dimensions of 35" x 16"
 - Exterior mesh accessory pocket
- Colors: Black, Pink, Realtree Xtra® Realtree Max-1™, and Lost® Camo



FLATLINE™ 4417 BOW CASE

- Sleeve-style bow case for maximum protection and space saving compact size.
 - Compatible with all Easton arrow tote and arrow case models. Premium oversized #10 zippers with easy grab pulls
 - Fits most bows and arrow cases; interior dimensions of 43" x 16"
 - Two exterior and one interior accessory pockets for release aids, rangefinders, tools or other archery essentials
- Colors: Black, Realtree Xtra® Realtree Max 1™, and Lost® Camo



DELUXE 4517 BOW CASE & 4517 LADIES BOWCASE

- Seven generously sized interior and exterior pockets for complete storage of bows, arrows, accessories, and range gear.
 - Compatible with all Easton arrow tote and arrow case models.
 - Premium oversized #10 zippers with easy-grab pulls
 - Cavernous 3.5" case-cube compatible fleece-lined padded interior (Case Cubes sold separately)
 - Fits most bows — interior dimensions 44" x 16"
 - 360° padding for complete bow protection
 - Movable bow-anchoring straps for rock-solid bow security
- Colors: Black, Realtree Xtra®, Realtree Max-1®, Lost® Camo, Realtree Max-1®/Lavender



NEW

DELUXE 4126 CROSSBOW CASE

- Modern designed crossbow case for maximum protection and gear storage needs
- Compatible with the Easton Deluxe Crossbow Arrow Case
- Case-cube compatible interior fleece hook and loop lining with adjustable bow attachment straps
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Compatible with both standard and reverse limb crossbows
- Includes one Corner Case Cube pocket
- Inside dimensions 41" x 26"



NEW

DELUXE 3915 & 3615 COMPOUND/RECURVE ROLLER BOW CASE

- Advanced wheeled compact travel case for compound or recurve bows
- Triple field-replaceable roller bearing wheels
- Double seatbelt system to securely anchor bows
- Three internal accessory pockets
- Available in two sizes (36"Lx15"Wx9"H) and (39"Lx15"Wx9"H)
- Compatible with the Easton Deluxe 33" Arrow Case
- Case Cube compatible interior fleece hook-and-loop lining with seatbelt strap bow retention system
- Hybrid hard/soft shell 360° perimeter protection for maximum contents protection
- Airline Travel Cover recommended (sold separately)



ELITE™ 4717 DOUBLE BOW CASE

- Two full-size target bow compatible
 - Inside dimensions 46"x16"
 - Case-cube compatible double fleece twin main compartment.
 - Double or single bow with opposite side clothing storage.
 - Dense EVA foam 360° exterior padding
 - Repositionable Velcro bow anchor system
 - Six interior and exterior accessory pockets
 - Compatible with Easton Arrow Tote
 - The best YKK reverse coil double zipper pulls
 - Shoulder strap included
- Available in Pro Tour black/grey/orange



NEW

ELITE 4716 & 4416 DOUBLE ROLLER BOW CASE

- Two full-size target bow compatible
 - Triple field-replaceable roller bearing wheels.
 - Available in two sizes (47"Lx16"Wx10"H) and (44"Lx16"Wx10"H) outside dimensions.
 - Double-walled protection – composite armor shield + foam 360° exterior padding.
 - Case-cube compatible double fleece main compartment.
 - Double seatbelt system to securely anchor bows
 - Padded internal divider blanket for layered storage.
 - Five interior accessory pockets, adjustable padded walls.
 - Three expanding outside luggage compartments
 - Four exterior accessory pockets
 - The best YKK reverse coil double zipper pulls.
 - Compatible with Easton Arrow Tote
 - Airline Travel Cover recommended (sold separately)
- Available in Pro Tour black/grey/orange

RECURVE PACKS

CLUB XT™ RECURVE PACK

- Affordable recurve backpack with a modern sophisticated design
 - High-denier ballistic POLY fabric construction and fully adjustable shoulder harness
 - Fits up to 25" recurve handles and long limbs
 - Arrow tote included
- Colors: Grey, Blue, Red, Black



NEW

PRO TOUR™ RECURVE PACK

- Three oversized external accessory pockets
 - Micro fleece lining
 - Individual storage for stabilizers, arrows, limbs, and other accessories
 - Removable gear folder
 - Fits up to 25" recurve handles and long limbs
 - Integrated quick-access rain cover
 - Easy-access stabilizer storage (fits any length stabilizer)
 - External tripod/spotting scope storage (Equipment shown and travel cover sold separately)
- Colors: Grey



ELITE™ RECURVE BACKPACK

- 6061-T6 aluminum internal frame suspension for easy carrying of heavy loads
 - Fits up to 27" recurve handles and long limbs
 - Collapsible stabilizer sleeve & arrow tote
 - External, cinchable tripod pocket
 - Privacy mesh pocket for business cards
 - High-denier nylon construction
 - Cinch straps for total load security
 - Arrow tote included
- Colors: Grey



NEW

TEAM SERIES PACKS

Experienced competitive archers know that on the field of play, a bowcase alone is never enough. Tools, hydration, optics, inclement weather clothing, backup gear, snacks and other necessities need to be kept organized and convenient for access at a moment's notice.

Easton's line of country-code-color Team Series backpacks are the ideal solution for the serious tournament competitor. Team Series packs are available in six color combination choices, representing more than 120 World Archery member nations.



NEW

720 TEAM-COLOR PACK

- Hydration System compatibility
- Durable Nylon 420D construction
- YKK® quality zippers
- Packs into itself for easy transport
- Integrated seat pad
- 1100 cubic inches, 18 liter capacity

NEW



10-RING TEAM-COLOR PACK

- 1700 cubic inch/27 liter
- Bellowed front pocket
- Twin stretch hydration pockets
- YKK® zippers
- Hydration System compatibility
- Nylon 420D construction

BOW CASE ACCESSORIES

CASE CUBES BOW CASE ACCESSORY POCKETS

- Most efficient bow case accessory storage system ever created
- Durable 2.5" deep fabric construction with padded surrounds and clear mesh zippered closure
- Maximize your space by organizing gear in and around your bow inside your case
- Hook-and-loop attachment for customized fit and easy in-and-out accessory storage



QUARTER CUBE 7.5" X 7.5"
FULL CUBE 15" X 15"
HALF CUBE 7.5" X 15"
CORNER CUBE 7.5" X 10"

ROLLER BOWCASE TRAVEL COVERS

- Custom tailored for specific roller bowcase models
- A must for airline-travel bowcase protection
- Compression-molded semi-rigid bottom
- Premium #10 zippers for maximum strength
- Double wide buckled straps for extra security
- ID card slot



NEW

BOW SLEEVE

- Durable 600D fleece-lined sleeve to protect bow from other gear
- Adjustable for up to 47" bows
- Fits inside all bowcases



NEW

STABILIZER SYSTEM SLEEVE

- Durable 600D fleece-lined sleeve and pocket bag to store entire stabilizer system: main rods, side rods, V-bars, weights
- Length adjustable, protects other equipment in the same bow case
- Fits inside all bowcases



NEW

DELUXE MOLDED ARROW CASES

- Includes foam arrow dividers
- Holds arrows securely (with or without points)

Three sizes:

Deluxe 36" (24-arrow) - outside dimensions (36"x6.5"x3")

Deluxe 33" (18 arrow) - outside dimensions (33"x5"x3")

Deluxe Crossbow (12 arrow) - outside dimensions (24"x6.5"x3")



NEW

ARROW TOTE

- Convenient arrow protection travel tube
- One size fits most



PRO TOUR GEAR

EASTON TEAM JERSEY

- Quick-dry moisture management
 - Lightweight fabric
- Women: XS-XL
Men: S-4XL



PRO TOUR™ JACKET AND VEST

- Soft-shell tech fabric
 - Micro fleece lining
- Sizes: S-XXL



COMPRESSION SHIRTS

- Thermal dynamic for comfort in hot and cold conditions
 - Layer under shooter jerseys or hunting clothing
 - Wicks moisture
 - Compression comfort
- Sizes: S-XXL



VISOR
One size fits all



PRO TOUR™ SUNGLASSES

GRAY SHOOTER FITTED HAT
Sizes: S/M, L/XL



EASTON SHOOTER HAT
Adjustable closure



SHOOTER TOWEL

ACCESSORIES & CLOTHING

ARM GUARDS

Progressive designs molded from durable, polycarbonate material. Innovative magnetic buckle allows for easy, one-hand fastening.

- Durable elastic straps ensure a snug fit
 - Available in oval and bone configurations
- Colors: red, blue, smoke and yellow



RELEASE POUCH

- Extra-sturdy design
- Holds up to four releases
- Draw string top protects against the elements
- Zippered external pocket
- Internal divider



CHEST PROTECTOR

- Unique comfort-fit design
 - Breathable air-mesh construction
 - Easy-adjust shoulder
- Sizes: Right-handed and left-handed models XS, S, M, L, XL and XXL
- Colors: black and white



DELUXE PARACORD DIAMOND SLING

- Comfortable leather mount
- Deluxe wide cobra braid
- Easy to adjust
- Available in a wide range of colors



STIFF SLING

- Clean design
 - Vibration reducing molded mount
 - Stiff sling material holds its shape for quick access
- Colors: black, brown, green, pink, blue, red and orange



VINTAGE LOGO TEE & SWEATSHIRT
Mens: S-3XL



ORANGE STREAK TEE
Mens: S-3XL



EDGE TEE
Mens: S-3XL



EASTON BUCKET HAT
Sizes: S/M, L/XL



GRAY FADE HAT
Adjustable Velcro strap



DELUXE NEOPRENE WRIST SLINGS

- Durable, lightweight neoprene construction
 - Easy-adjust strap
- Designs: Diamond Plate, Arrow, Elk and Whitetail

BEGINNER ARCHERY

Introductory line of easy-to-use beginner archery products for the aspiring archer.

BEGINNER BOWS

The Easton beginner bow is the perfect set up to get you started shooting archery. Easton has been building archery equipment since 1922, and that experience is built into a high quality recurve bow for long-lasting fun. The bow features a lightweight, slim, polymer technology riser and durable glass-reinforced limbs. At only 1.3 lbs., the Easton recurve is easy to handle and the ideal starter set up for any aspiring archer. With a smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.

- Ambidextrous design for either right or left-handed archers
- Integrated sight channel
- Custom Dacron string
- Ambidextrous arrow rest and sight pin included
- High-strength glass/polymer limbs and advanced polymer riser
- Ideal beginner draw weight range 10-20 pounds
- Max 26" draw
- Available in bow only and kit configurations
- Made in USA

XX75 BULK PACK
• Colors: Pink and black



ARCHERY COMBO PACK

- High quality 600D fabric hip quiver
- Holds up to 12 arrows
- Integrated belt clip
- Three XX75® size 1816 high strength 28" arrows
- High strength 7075 aerospace-grade alloy
- Comfort-flex finger tab
- Polymer arm guard
- Fits right or left-handed archers
- Colors: Black and pink



SCOUT 2™

- Durable fiberglass construction
- Over Nock – installed
- Sleeve Point – installed

XX75®

- 7075 aerospace alloy
- Guaranteed straightness: ±.005
- Weight tolerance: ±2.5%
- Strength (psi): 90,000
- Size 1816
- Uses one-piece point and conventional nock



COMFORT FLEX ARM GUARD

- Flexible molded composite
- One size fits all
- Elastic arm band with adjustable cord locks



BEGINNER FINGER TAB

- Ambidextrous design works well for right and left handed archers



RECURVE BOW REPLACEMENT SIGHT PIN

- Thumb nut and lock nut included



RECURVE BOW REPLACEMENT ARROW REST

- Full capture design, perfect for beginners
- Ambidextrous design works well for right and left handed archers



REPLACEMENT BOW STRING



Jim Easton shooting his bow in the 1940's.

2015 TARGET SHAFT MODELS

Alloy/Carbon	Pg #	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ¹	Color/Finish	Sizes
X10 [®]	4	High-strength carbon fiber bonded to a precision 7075 alloy core tube —barreled shaft	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 Pin	Pin Nocks X10 Overnock	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	1000, 900, 830, 750, 700, 650, 600, 550, 500, 450, 410, 380, 350, 325
X10 [®] PROTOUR™	6	High-strength carbon fiber bonded to a precision 7075 alloy core tube —single-taper shaft	N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 or ProTour Pin	Pin Nocks	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	770, 720, 670, 620, 570, 520, 470, 420, 380
A/C/E [®]	5	High-strength carbon fiber bonded to a precision 7075 alloy core tube —barreled shaft	A/C/E Insert	Screw-in, One-piece or A/C/E Stainless Steel Break-off	A/C/E Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grains	±.0015" guaranteed	Polished Black Carbon	(1250, 1100) ² , 1000, 920, 850, 780, 720, 670, 620, 570, 520, 470, 430, 400, 370
A/C/C™	8	High-strength carbon fiber bonded to a precision 7075 alloy core tube	RPS Insert or Halfout Insert	One-piece Parabolic, NIBB, or RPS Point	UNI System	G Nock or Pin Nock	±0.5 grains	±.002" guaranteed	Black, Micro-smooth Finish	2-00, 3L-00, 3-00, 2L-04, 2-04, 3X-04, 3L-04, 3-04, 3L-18, 3-18, 3-28, 3-39, 3-49, 3-60, 3-71
TRIUMPH	12	Alloy reinforced point end with multi-layer wrapped carbon fiber	N/A	Triumph One-Piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	500, 450, 400, 350
A/C/G [®]	7	High-strength carbon fiber bonded to a precision 7075 alloy core tube	A/C/E Insert	Screw-in, One-piece, A/C/E or A/C/G Stainless Steel Break-off	A/C/E & A/C/G Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grain	±.002" guaranteed	Polished Black Carbon	1500, 1300, 1150, 1000, 880, 810, 710, 660, 610, 540, 480, 430

Carbon	Pg #	Materials/Construction	Inserts	Points	Nock System	Nock Type	Weight Tolerance ⁴	Straightness ²	Color/Finish	Sizes
CARBON ONE™	9	UltraLite carbon fibers	A/C/E Insert	Carbon One Stainless Steel Break-off	A/C/E Pin, Carbon One Pin, or insert Nock	Pin Nock, Pin G Nock, G Nock	±1 grains	±.003"	Black, Micro-smooth Finish	1150, 1000, 900, 810, 730, 660, 600, 550, 500, 450, 410
APOLLO™	10	UltraLite carbon fibers	A/C/E Insert	Apollo One-Piece	A/C/E Pin, Carbon One Pin, or insert Nock	Pin Nock, Pin G Nock, G Nock	±2 grains	±.005"	Black, Micro-smooth Finish	1200, 1070, 950, 840, 740, 670, 610, 560
FULL BORE™	18	SuperLite Carbon multi-layer wrapped fibers	N/A	One-piece Bullet	Super or G Nock UNI System	3D, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	350, 270
SUPERDRIVE™	16	Multi-layer wrapped Carbon fiber	N/A	One-piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	290
LIGHT SPEED 3D™ LIGHT-SPEED™	19	SuperLite Carbon multi-layer wrapped fibers	CB Insert	CB or RPS Point	UNI System	G Nock	±2 grains	±.001" ±.003"	Black, Smooth-matte Finish	500, 400, 340
FAT BOY™	13	SuperLite Carbon multi-layer wrapped fibers	RPS Insert	One-piece or RPS Point	Super or G Nock UNI System	3D, Super Nock, or G Nock	±2 grains	±.003"	Black, Smooth-matte Finish	500, 400, 340
INSPIRE™	11	Small diameter purtruded carbon	NA	Zinc One-piece Point	NA	G Nock or X Nock	NA	NA	Black, Smooth-matte Finish	1400, 1200, 1000, 900, 750, 630, 570

Alloy	Pg #	Aerospace Alloy	Strength ³ (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance	Straightness ¹	Color/Finish	Sizes
X ²⁻³ ™ X ²⁻⁷ ™	14	7178-T9	105,000	RPS Insert	NIBB, One-Piece Bullet or RPS Point	Super UNI System	3D Super, Super Nock or S Nock	+3/4%	+ .001" Guaranteed	Diamond Polished Silver Anodized	2712, 2312, 2314, 2315
ECLIPSE™	15	7178-T9	105,000	Not Available	NIBB or One-piece Bullet	UNI or Super UNI System	3D Super Super Nock S Nock or G Nock	±3/4%	±.001" Guaranteed	Hard-Anodized Polished Black	1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413, 2511, 2512, 2612, 2613, 2712
XX75 PLATINUM [®] PLUS	20	7075-T9	96,000	RPS Insert	NIBB, One-piece Bullet, or RPS Point	UNI or Super UNI System	3D Super Super Nock or S Nock	±1%	±.002" Guaranteed	Hard-Anodized Platinum Grey	1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315
JAZZ [®]	21	7075	90,000	RPS Insert 1716 & up	NIBB, One-piece Bullet, or RPS Point	Full-Diameter Taper Swage	Conventional or G Nock ⁶	±2%	±.005" Guaranteed	Hard-Anodized Purple/Silver	1214 ⁴ , 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
TRIBUTE™	20	7075	90,000	RPS Insert 1716 & up	NIBB, One-Piece Bullet or RPS Point	Full-Diameter Taper Swag	Conventional or G Nock	±2%	±.005" Guaranteed	Hard-Anodized Black	1214 ⁴ , 1413, 1416, 1516 1616, 1716, 1816, 1916, 2016
GENESIS™	22	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	N nock	±2.5 grains	±.005" Guaranteed	Hard-Anodized Bright Blue, Orange	1820
NEOS™	21	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	Conventional	±5%	±.008" Guaranteed	Hard-Anodized Gold	1618

1 Guaranteed straight to more stringent standards than ATA/ASTM methods.
2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.
3 Tensile strength value may vary ±3%.
4 Grains-per-shafts in a dozen bundle.
5 Special order only.
6 1214 size Jazz uses direct-fit G Nock.
Eclipse and Platinum Plus sizes in italics use UNI System and G Nock.
*/™ Registered Trademark/Trademark of Easton.

ALLOY SHAFT AND COMPONENT SPECIFICATIONS

Size	Shaft Weight		Spine @ 28" Span	Stock Length ¹		UNI System ⁵					
	XX75 ²	X7 ²		75 ¹	X7 ²	Conventional Nock Size ⁴	UNI Bushing ⁶	Super UNI Bushing ¹⁰	NIBB Point	One-piece Bullet Point	RPS ⁷ Insert Alum.
	Grains per Inch		Deflection in Inches	Inches	Inches	Grains	Grains	Grains ⁸	Grains ⁸	Grains ⁸	Grains ⁸
1214	5.9	—	2.501	26½	—	—	—	—	45	—	—
1413	5.9	—	2.036	26	—	7/32	—	—	35	—	—
1416	7.2	—	1.684	27	—	7/32	2	—	52	—	—
1514	—	6.8	1.379	—	26½	—	5	—	61 ⁹	—	—
1516	7.3	—	1.403	27½	—	1/4	3	—	48	—	—
1614	—	7.7	1.153	—	28	—	5	—	51	—	—
1616	8.4	—	1.079	28½	—	1/4	5	—	56	—	—
1618	9.8	—	0.957	32½	—	1/4	—	—	50	—	—
1713	7.4	—	1.044	29	—	—	7	—	54	—	—
1714	—	8.1	0.963	—	29	—	7	—	56	—	—
1716	9.0	—	0.880	29	—	1/4	7	—	60	68	10
1813	7.9	—	0.874	30	—	1/4	8	—	56	—	14
1814	—	8.6	0.799	—	29½	—	8	—	60	—	—
1816	9.3	—	0.756	30	—	9/32	8	—	63	74	12
1820	12.2	—	0.592	29½	—	9/32	—	—	59	—	—
1913	8.3	—	0.733	31	—	9/32	9	—	64	—	18
1914	—	9.3	0.658	—	30½	—	9	—	64	—	—
1916	10.0	—	0.623	31	—	9/32	9	—	72	82	16
2013	9.0	—	0.610	32	—	—	—	5	68	—	21
2014	—	9.6	0.579	—	31½	—	(10)	5	71	—	—
2016	10.6	—	0.531	32	—	—	—	4	80	90	20
2114	9.9	9.9	0.510	31	32½	—	(11)	7	78	100	25
2212	—	8.8	0.505	—	32½	—	(13)	9	102 ⁹	100	31
2213	9.8	9.9	0.458	31	33½	—	(13)	9	88	100	30
2214	—	10.4	0.425	—	33	—	(13)	9	103 ⁹	100	—
2311	—	8.9	0.450	—	33	—	(15)	11	99 ⁹	100	37
2312	—	9.5	0.423	—	33	—	(15)	11	99 ⁹	100	37
2314	10.7	10.8	0.391	32	33½	—	(14)	10	—	100	34
2315	11.7	11.8	0.342	32	34	—	—	11	—	100	37
2412	—	9.7	0.400	—	34	—	(17)	12	110	100	40
2413	—	10.5	0.365	—	34	—	(17)	12	110	100	40
2511	—	9.6	0.348	—	34	—	(20)	15	108 ⁹	100	52
2512	—	10.3	0.321	—	34½	—	(20)	15	108 ⁹	100	52
2612	—	10.7	0.285	—	34½	—	(22)	17	—	150	58
2613	—	11.5	0.265	—	34½	—	(22)	17	—	150	58
2712	—	11.3	0.260	—	34½	—	—	19	—	150/300	—

— Indicates not available
1 XX75 Tribute, Jazz, and Platinum Plus.
2 X7 Eclipse.
3 Length is approximate stock shaft length for each size.
4 Nock size for conventional swaged nock taper.
5 UNI—Universal Nock Installation System.
6 Parentheses indicate smaller G Nock UNI Bushing size is available as an optional accessory.
7 RPS = Replaceable Point System with 8-32 ATA Standard thread.
8 NIBB point grain weights are ±0.5 grain. All other components are ±1 grain.
9 This NIBB point will provide approximately an 8% F.O.C. All other NIBB points are approximately 7% F.O.C.
10 Super UNI Bushing accepts Super, S, & 3D Super Nock.
11 X Nock UNI Bushing.

⚠ WARNING FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE @ www.bsafes.ws or 877-INFO-ETP.

ARROW BREAKAGE

Any arrow can become damaged. A damaged arrow could break upon release and injure you or a bystander. Damage to an arrow shaft, or any of its components, may occur from: improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way. **WARNING! NEVER SHOOT A DAMAGED ARROW.**


ARROW USE PRECAUTIONS

Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft, nock, and other components to see that they have not been damaged. Before shooting, place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged. If your arrow is crested, inspect for damage on the crest surface. You may need to remove the cresting to make a thorough inspection. If shaft damage is present, **DISCARD THE ARROW. WARNING! NEVER SHOOT A DAMAGED ARROW.** Before each shot, inspect the nock for damage. If the nock is damaged, replace the nock. **WARNING! NEVER SHOOT AN ARROW WITH A DAMAGED NOCK.**

Before each shot, check that the nock is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or the fit is loose (rotates easily), inspect further for cracks in the nock end of the arrow shaft. If applicable, you may need to remove the cresting to make a thorough inspection. If there are cracks in the shaft or the nock is loose, **DISCARD THE ARROW. NEVER SHOOT A DAMAGED ARROW.**

ADDITIONAL TESTS FOR CARBON ARROWS

When checking carbon arrows, perform the following additional tests:
1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel and listen for cracking. Perform this test four to six times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged. **WARNING! DISCARD THE ARROW. NEVER SHOOT A DAMAGED ARROW.**
2. While still holding the point and fletching ends, twist the shaft in opposite directions. If the arrow "relaxes" or twists easily, the carbon has been damaged. **WARNING! DISCARD THE ARROW. NEVER SHOOT A DAMAGED ARROW.**
A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, **WARNING! DISCARD THE ARROW. NEVER SHOOT A DAMAGED ARROW.** If you do not understand these instructions, or cannot adequately perform the above tests, seek the appropriate assistance.

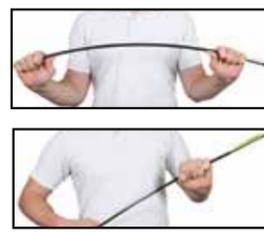

LIMITED WARRANTY


The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from date of purchase. It does not cover damage caused by impact from another arrow, impact with hard objects, improper cleaning or fletching, or from normal wear. Warranty does not apply if damage results from any non-compliance of printed instructions. Arrow shafts that are defective will be replaced by your local dealer or by Easton.



For more information on arrow preparation and assembly, visit www.eastonarchery.com



TARGET ARCHERY SINCE 1922

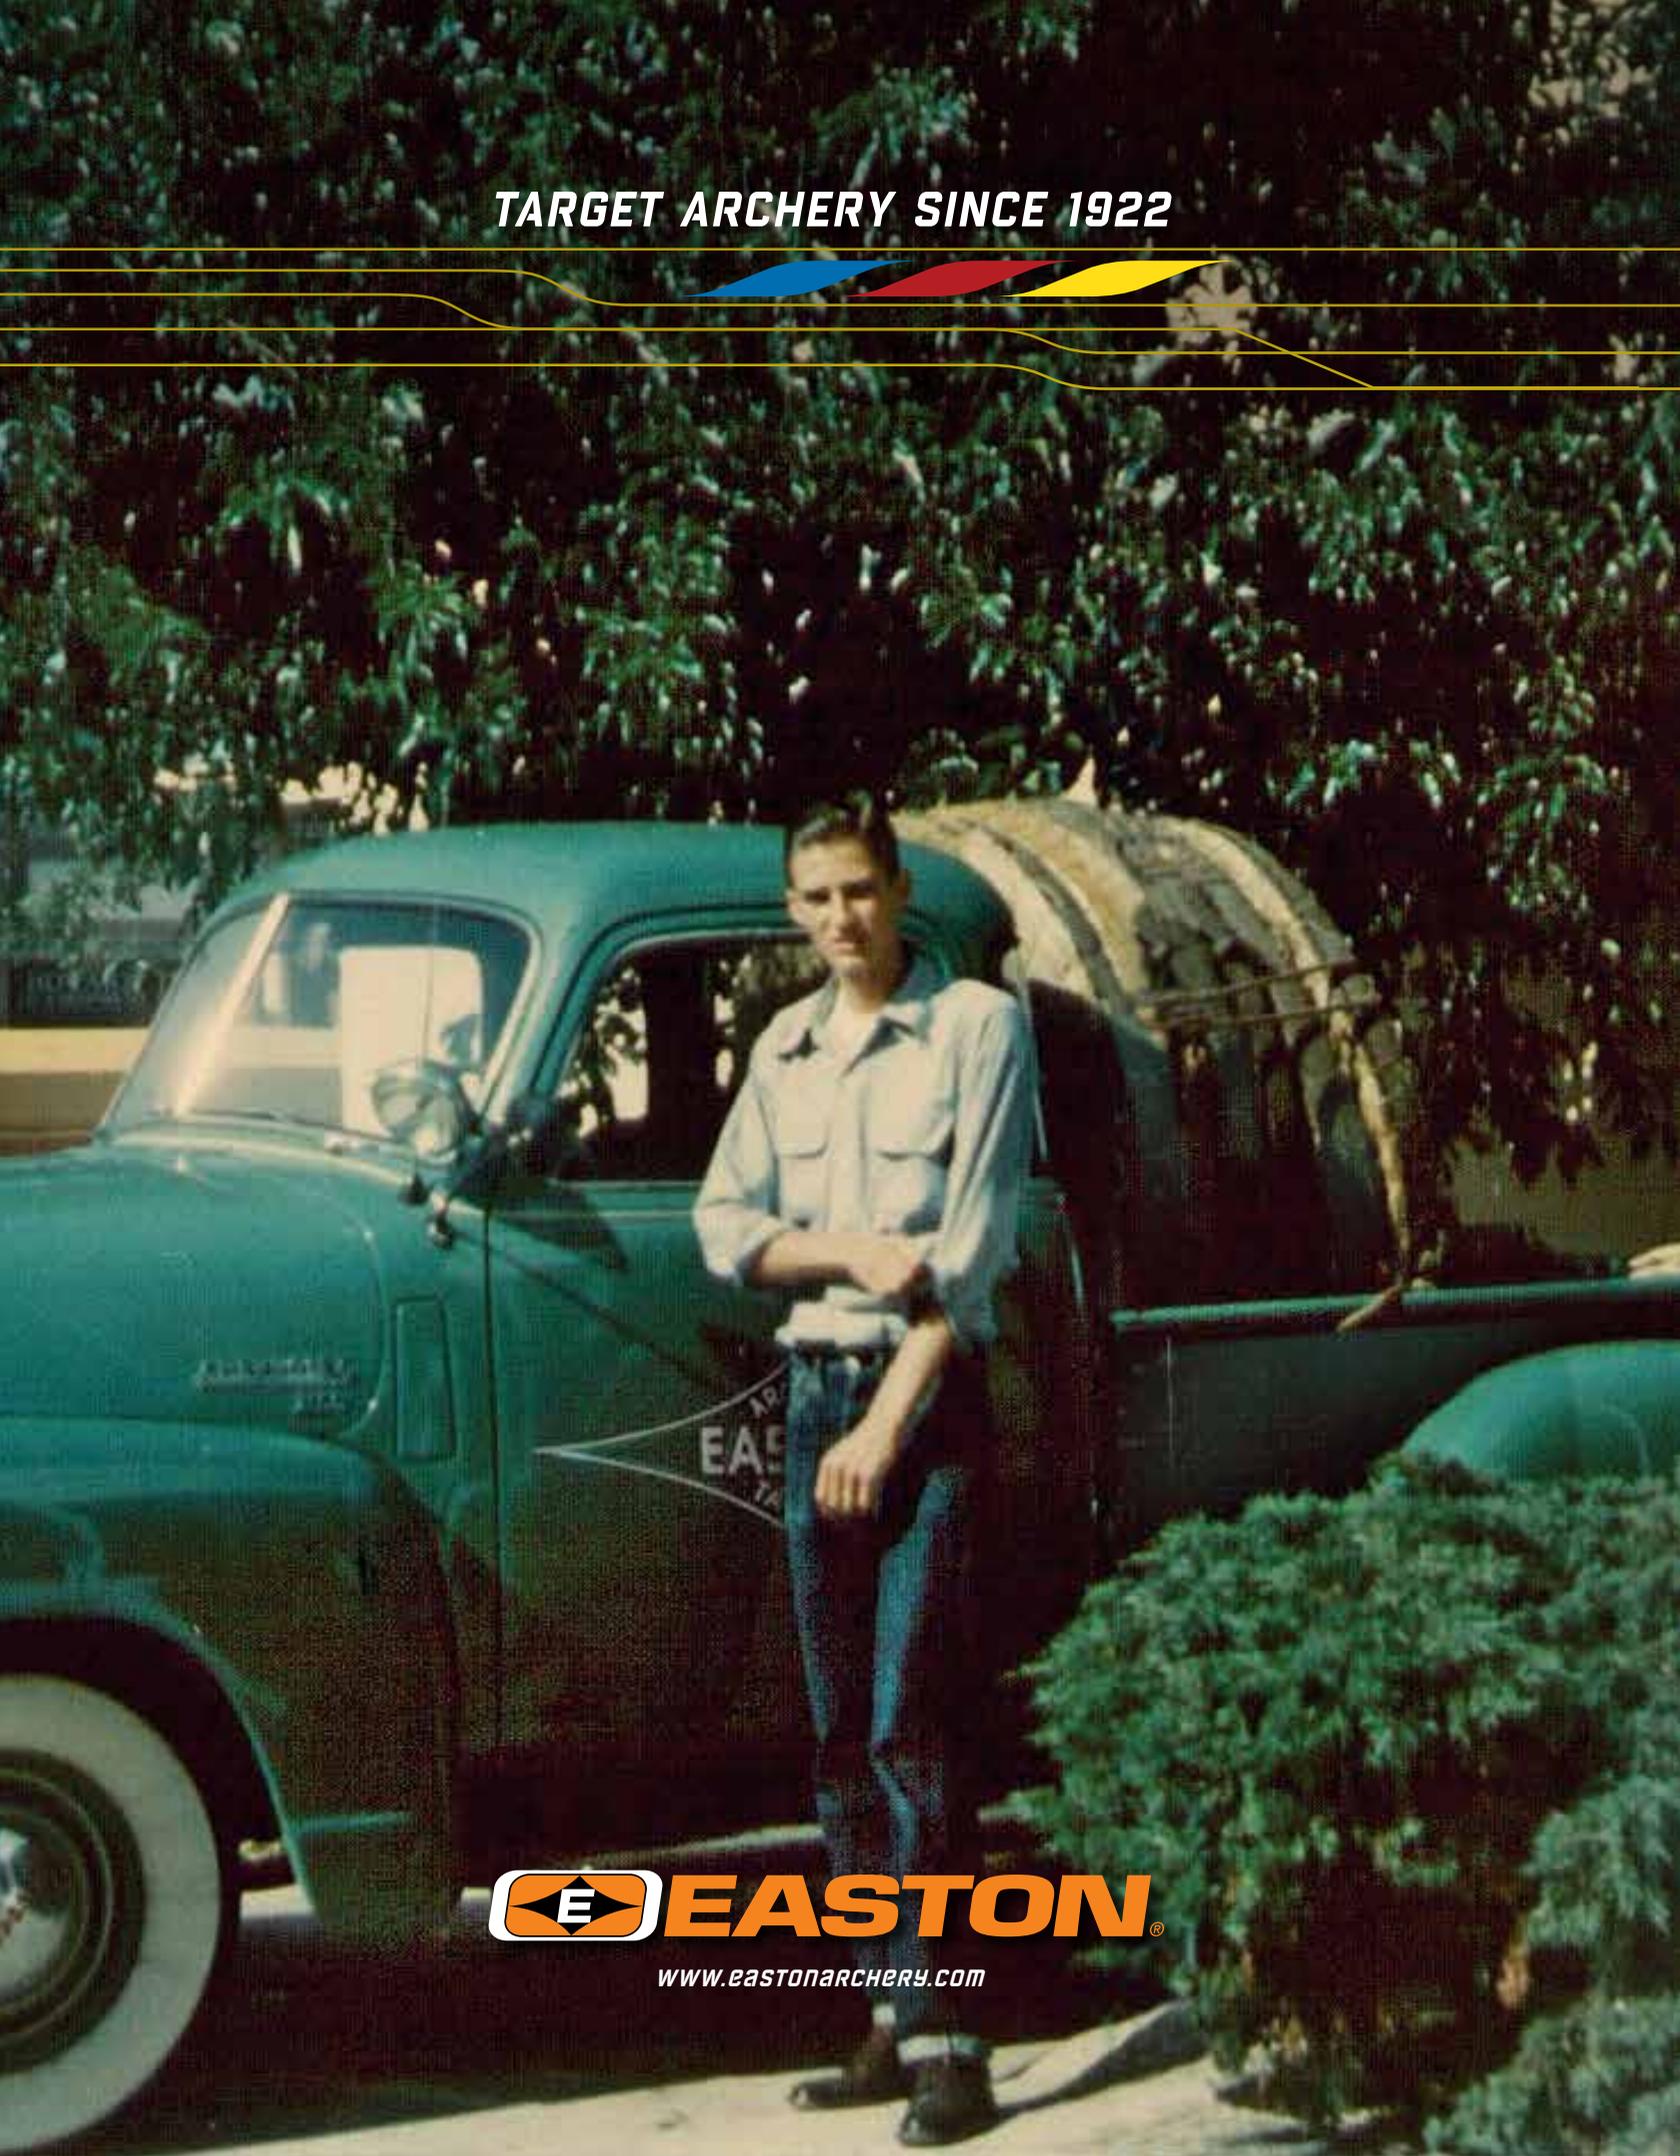

 **EASTON**®

www.eastonarchery.com